

# LUXIENT150 SURFACE

## PREMIUM LED SURFACE MOUNTED DOWNLIGHT



- 95+ CRI
- up to 103 Lm/w
- 3000K or 4000K
- High quality, low glare reflectors
- Black baffle for superior glare control
- Made in Australia
- L90B10 up to 90,000 hours
- 2 X SDCM
- Cyanosis approval in 4000K




### LUXIENT 150 SURFACE- 500mA

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts	Lm/W
LX150.500.55.93.61.S	LX150.500.55.93.63.S	LX150.500.55.93.66.S	55°	3000K	2477	28	88
LX150.500.55.94.61.S	LX150.500.55.94.63.S	LX150.500.55.94.66.S	55°	4000K	2681	28	95
LX150.500.85.93.61.S	LX150.500.85.93.63.S	LX150.500.85.93.66.S	85°	3000K	2736	28	98
LX150.500.85.94.61.S	LX150.500.85.94.63.S	LX150.500.85.94.66.S	85°	4000K	2794	28	100

### LUXIENT 150 SURFACE- 700mA

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts	Lm/W
LX150.700.55.93.61.S	LX150.700.55.93.63.S	LX150.700.55.93.66.S	55°	3000K	3441	38	90
LX150.700.55.94.61.S	LX150.700.55.94.63.S	LX150.700.55.94.66.S	55°	4000K	3626	38	95
LX150.700.85.93.61.S	LX150.700.85.93.63.S	LX150.700.85.93.66.S	85°	3000K	3620	38	95
LX150.700.85.94.61.S	LX150.700.85.94.63.S	LX150.700.85.94.66.S	85°	4000K	3909	38	103

## LUXIENT 150 SURFACE- 55°

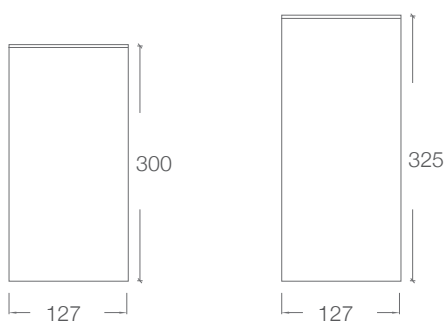


500mA

NON DIM  
& DIMMING

700mA

NON DIM  
& DIMMING

## LUXIENT 150 SURFACE - 85°

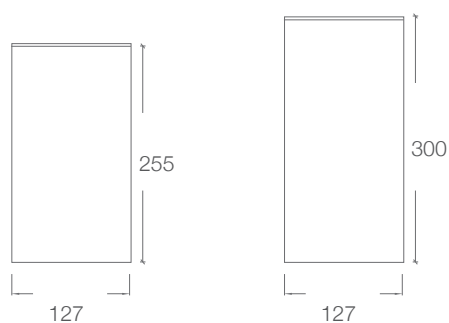

500mA

NON DIM  
& DIMMING

700mA

NON DIM  
& DIMMING

### Body Finishes



### Custom Luminaire Modifications

2700K and 3500K Colour Temperature

80+ CRI

Custom outputs

Casambi dimming

### Optional Reflector finishes

Satin black

Champagne

Satin gold



Matt white

Metalised

Brass



### Street Address:

39 Tinning Street, Brunswick,  
Victoria, 3056, Australia

### Postal Address:

PO BOX 5084  
Moreland West VIC 3055

T +61 3 9222 5522

[www.elslighting.com.au](http://www.elslighting.com.au)

