ARCHI 16

Project name:

Type number: Quantity: Date:

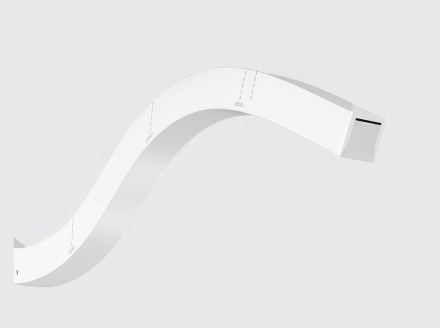

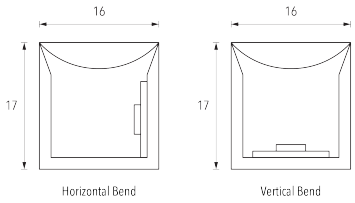

Product Details

Absolute luminous flux (lm)	410 - 1054 lm
Power (W)	6 - 13W
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Colour deviation	3 SDCM
Dimming methods	Non Dim / DALI / Bluetooth (Casambi)
Lumen maintenance (hours)	L70 > 70,000 hours
Driver	Remote
Input voltage	24V
Housing material	Silicone
Optic material	Silicone
IP rating	IP67
Warranty	5 years

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Configurator

How to specify

Select from the available options to configure luminaire

AR16.____.____.____.____.____.____

Type

HB Horizontal Bend
VB Vertical Bend

Height & Length

1000 1000 mm
XXXX Custom Length divisible by 50 mm

Output

6 6W 410lm - 527lm
9 9W 590lm - 759lm
13 13W 820lm - 1054lm

CRI CCT

927 90+ 2700K
93 90+ 3000K
935 90+ 3500K
94 90+ 4000K

Dimming

61 Non Dim
66 DALI
68 Bluetooth (Casambi)

Options

1B 1 Bottom Cable Entry
1D 1 Direct End Cable Entry
1L 1 Left Cable Entry
1R 1 Right Cable Entry

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Accessories



AR16 Flexible Mounting Channel
AR16.FLEXIBLE CHANNEL

AR16 Fixed Mounting Channel
AR16.FIXED CHANNEL

AR16 Individual Mounting Clips
AR16.INDIVIDUAL CLIPS

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.