DATASHEET AR16RGBW

ARCHI 16 RGBW

Project name:

Type number: Quantity: Date:

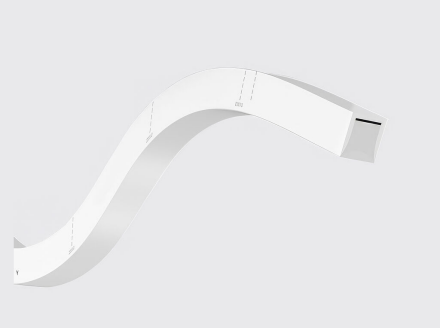

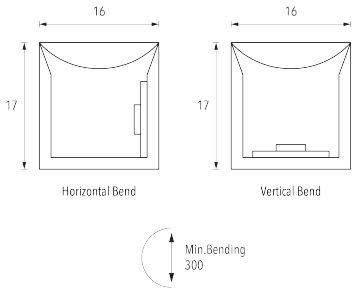

Product Details

Absolute luminous flux (lm)	90 - 118 lm
Power (W)	20W
CCT	RGB 3000K / RGB 4000K
Dimming methods	Non Dim / DALI / Bluetooth (Casambi)
Lumen maintenance (hours)	L70 > 70,000 hours
Driver	Remote
Input voltage	24V
Housing material	Silicone
Optic material	Silicone
IP rating	IP67
Warranty	5 years

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Configurator

How to specify

Select from the available options to configure luminaire

AR16.____.____.____.____.____.____

Type

HB	Horizontal Bend
VB	Vertical Bend

Height & Length

1000	1000 mm

Output

20	20W 90lm - 118lm

CRI CCT

RGBW3	RGBW - 3000K
RGBW4	RGBW - 4000K

Dimming

61	Non Dim
66	DALI
68	Bluetooth (Casambi)

Options

1B	1 Bottom Cable Entry
1D	1 Direct End Cable Entry
1L	1 Left Cable Entry
1R	1 Right Cable Entry

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Accessories

AR16 Fixed Mounting Channel
AR16.FIXED CHANNEL

AR16 Flexible Mounting Channel
AR16.FLEXIBLE CHANNEL

AR16 Individual Mounting Clips
AR16.INDIVIDUAL CLIPS

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.