FLEX 50 Adjustable Surface

Project name:

Type number: Quantity: Date:

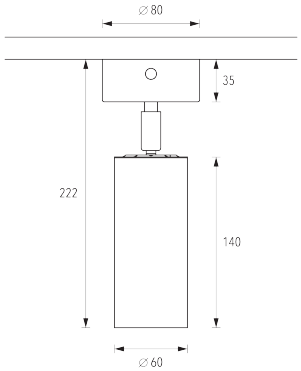

Product Details

Absolute luminous flux (lm)	572 - 1115 lm
Power (W)	6 - 10W
Optic options	16° / 23° / 30° / 54°
CRI	90+ / 95+
CCT	2700K / 3000K / 4000K / 3500K
Colour deviation	3 SDCM
Dimming methods	Non Dim / DALI / Bluetooth (Casambi)
Lumen maintenance (hours)	L90B10 > 90,000 hours
Driver	Integral
Input voltage	240v
Housing material	Aluminium
Optic material	PMMA Clear Lens
Warranty	7 years
Country of origin	Australia

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Configurator

How to specify

Select from the available options to configure luminaire

FAS50.____.____.____.____.____

Output

150	6W 572lm - 718lm
200	8W 587lm - 718lm
250	10W 842lm - 1115lm

Optic

16	16°
23	23°
30	30°
54	54°

CRI CCT

927	90+ 2700K
93	90+ 3000K
94	90+ 4000K
935	95+ 3500K

Dimming

61	Non Dim
66	DALI
68	Bluetooth (Casambi)

Housing colour

W	White
B	Black
X	Custom

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Accessories

Honeycomb Louvre
FAS50.HONEYCOMB
Used to provide additional glare control in sensitive areas. Easily installed by placing behind the luminaire baffle.

Colour Options

Housing colour

Black
B

White
W

Custom
X

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.