DATASHEET FAS70

FLEX 70 Adjustable Surface

Project name:

Type number: Quantity: Date:

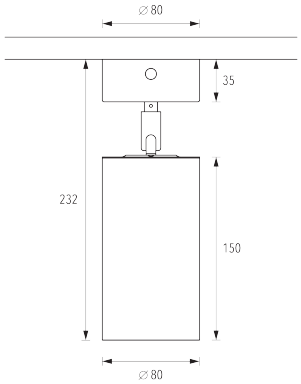

Product Details

Absolute luminous flux (lm)	770 - 1615 lm
Power (W)	8 - 14W
Optic options	25° / 34° / 54° / 80°
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Colour deviation	3 SDCM
Dimming methods	Non Dim / DALI / Bluetooth (Casambi)
Lumen maintenance (hours)	L90B10 > 90,000 hours
Driver	Integral
Input voltage	240v
Housing material	Aluminium
Optic material	PMMA Clear Lens
Warranty	7 years
Country of origin	Australia

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Configurator

How to specify

Select from the available options to configure luminaire

FAS70.____.____.____.____.____

Output

200	8W 770lm - 945lm
250	10W 955lm - 1172lm
300	12W 1137lm - 1395lm
350	14W 1317lm - 1615lm

Optic

25	25°
34	34°
54	54°
80	80°

CRI CCT

927	90+ 2700K
93	90+ 3000K
935	90+ 3500K
94	90+ 4000K

Dimming

61	Non Dim
66	DALI
68	Bluetooth (Casambi)

Housing colour

W	White
B	Black
X	Custom

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Accessories

Honeycomb Louvre
FAS70.HONEYCOMB
Used to provide additional glare control in sensitive areas. Easily installed by placing behind the luminaire baffle.

Colour Options

Housing colour

Custom
X

Black
B

White
W

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.