DATASHEET FFL70WW

FLEX 70 Wall wash

Project name:

Type number: Quantity: Date:



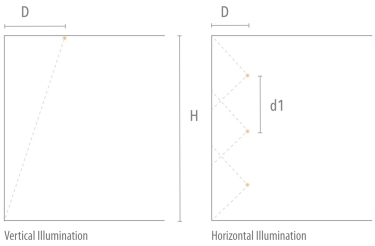

Product Details

Absolute luminous flux (lm)	633 - 1932 lm
Power (W)	8 - 23W
Optic options	Asymmetric
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Colour deviation	3 SDCM
Dimming methods	Non Dim / Trailing Edge / DALI / Bluetooth (Casambi)
Lumen maintenance (hours)	L90B10 > 90,000 hours
Driver	Integral
Input voltage	240v
Housing material	Aluminium
Optic material	PMMA Clear Lens
Warranty	7 years
Country of origin	Australia
Cut out size	Ø87mm

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Configurator

How to specify

Select from the available options to configure luminaire

FFL70.____.____.____.____.____

Output

200	8W 633lm - 704lm
250	10W 784lm - 873lm
300	12W 934lm - 1039lm
350	14W 1081lm - 1204lm
400	16W 1226lm - 1359lm
450	18W 1369lm - 1502lm
500	20W 1486lm - 1638lm
550	21W 1621lm - 1791lm
600	23W 1735lm - 1932lm

Optic

AS	Asymmetric

CRI CCT

927	90+ 2700K
93	90+ 3000K
935	90+ 3500K
94	90+ 4000K

Dimming

61	Non Dim
63	Trailing Edge
66	DALI
68	Bluetooth (Casambi)

Housing colour

W	White
B	Black
X	Custom

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Colour Options

Housing colour

White
W

Black
B

Custom
X

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.