DATASHEET FGPH-2X

FLUTE Pendant Horizontal 2X

Project name:

Type number: Quantity: Date:

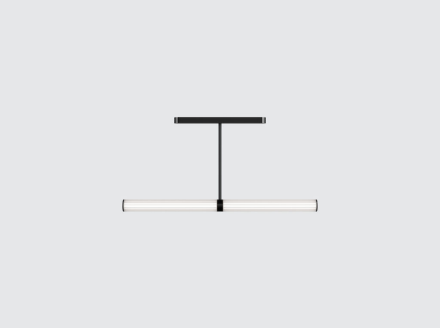



Product Details

Optic options	Fluted Glass / Opal Polycarb
CRI	90+
CCT	2700K / 3000K / 4000K
Colour deviation	3 SDCM
Dimming methods	Non Dim / DALI / Bluetooth (Casambi)
Lumen maintenance (hours)	L80B10 > 72,000 hours
Driver	Integral
Input voltage	240v
Housing material	Aluminium
Optic material	Fluted Cylindrical Glass
Suspension	Rod suspended 1m
IP rating	IP44
Warranty	7 years
Country of origin	Australia

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Configurator

How to specify

Select from the available options to configure luminaire

FGPH.2x6.____.____.____.____.____

Output	Optic	CRI CCT	Dimming	Housing colour
W042	FG Fluted Glass	927 90+ 2700K	61 Non Dim	W White
	PC Opal Polycarb	93 90+ 3000K	66 DALI	B Black
		94 90+ 4000K	68 Bluetooth (Casambi)	X Custom

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Colour Options

Housing colour



Black
B

White
W

Custom
X

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.