FUSE 170 Linear

Project name:

Type number: Quantity: Date:

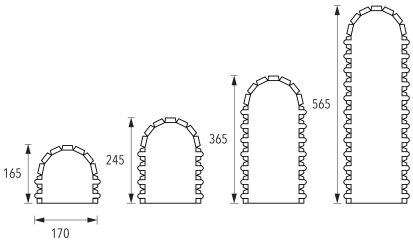

Product Details

Absolute luminous flux (lm)	1550 - 3317 lm / 477 - 509 lm (UP)
Power (W)	18 - 28W / 6W (UP)
Optic options	65° / 80° / Asymmetric / Flat Diffuser
CRI	90+
CCT	3000K / 4000K
Colour deviation	3 SDCM
Dimming methods	Non Dim / DALI / Bluetooth (Casambi)
Lumen maintenance (hours)	L80B10 > 72,000 hours
Driver	Integral
Input voltage	240v
Housing material	PET
Optic material	Opal Polycarbonate
Suspension	Wire suspension 3m
Acoustic material	100% PET (80% post-consumer recycled)
Warranty	7 years
Country of origin	Australia

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Configurator

How to specify

Select from the available options to configure luminaire

FSL170.____.____.____.____

Height & Length

165.1120 165 mm - 1120 mm
165.XXXX 165 mm - Custom Length divisible by 280 mm
245.1120 245 mm -1120 mm
245.XXXX 245 mm - Custom Length divisible by 280 mm
365.1120 365 mm - 1120 mm
365.XXXX 365 mm - Custom Length divisible by 280 mm
565.1120 565 mm - 1120 mm
565.XXXX 565 mm - Custom Length divisible by 280 mm

Acoustic cover colour

See colour swatches

Connector colour

See colour swatches

Options

Cloth
3C.BLK Cloth Cable - 3 Core - Black
3C.WH Cloth Cable - 3 Core - White
5C.BLK Cloth Cable - 5 Core - Black
5C.WH Cloth Cable - 5 Core - White

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Configurator

How to specify

Select from the available options to configure luminaire

UD45.S.____.____.____.____.____.____.____.____.____.____

Type

P Pendant
S Surface Mount*
W Wall Mount

Height & Length

1120 1120 mm
XXXX Custom Length divisible by 280 mm

Output

18 18W 1550lm - 2254lm
23 23W 1830lm - 2795lm
28 28W 2116lm - 3317lm

Output - UP*

5 6W 477lm - 509lm

Optic

65 65°
80 80°
AS Asymmetric
F Flat Diffuser*

Optic - UP

F Flat Diffuser

CRI CCT

93 90+ 3000K
94 90+ 4000K

Dimming

61 Non Dim
66 DALI
68 Bluetooth (Casambi)

Housing colour

W White
B Black
X Custom

Options*

Louvre
W White Louvre
B Black Louvre

Notes *

Flat Diffuser (Optic) cannot be selected with White Louvre, Black Louvre (Options)
Surface Mount (Type) cannot be selected with 5W (Output - UP)

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Colour Options

Acoustic cover colour & Connector colour

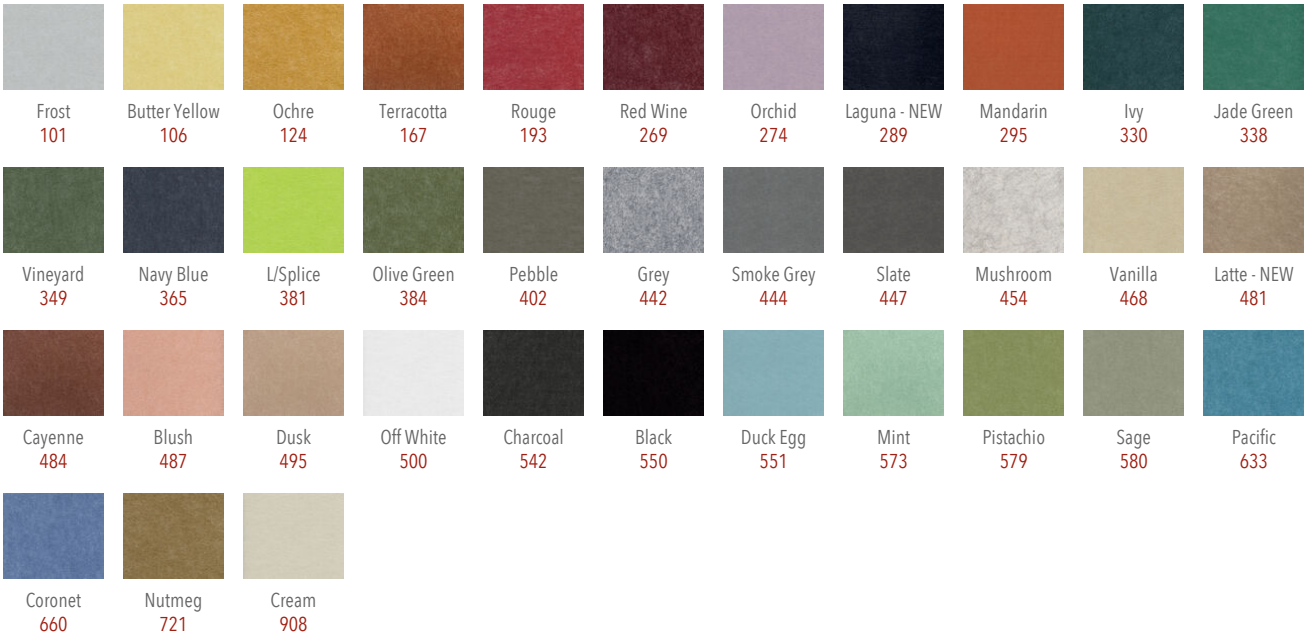

Frost 101 | Butter Yellow 106 | Ochre 124 | Terracotta 167 | Rouge 193 | Red Wine 269 | Orchid 274 | Laguna - NEW 289 | Mandarin 295 | Ivy 330 | Jade Green 338

Vineyard 349 | Navy Blue 365 | L/Splice 381 | Olive Green 384 | Pebble 402 | Grey 442 | Smoke Grey 444 | Slate 447 | Mushroom 454 | Vanilla 468 | Latte - NEW 481

Cayenne 484 | Blush 487 | Dusk 495 | Off White 500 | Charcoal 542 | Black 550 | Duck Egg 551 | Mint 573 | Pistachio 579 | Sage 580 | Pacific 633

Coronet 660 | Nutmeg 721 | Cream 908

Options

Cloth Cable - 3 Core - Black 3C.BLK | Cloth Cable - 3 Core - White 3C.WH | Cloth Cable - 5 Core - Black 5C.BLK | Cloth Cable - 5 Core - White 5C.WH

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.