DATASHEET VLT27-638

VERSALINE 638 Track luminiare

Project name:

Type number: Quantity: Date:

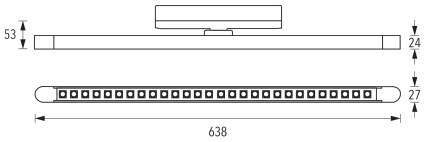

Product Details

Absolute luminous flux (lm)	1321 - 2273 lm
Power (W)	14 - 22W
Optic options	58°
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Colour deviation	3 SDCM
Dimming methods	Non Dim / DALI / Bluetooth (Casambi)
Lumen maintenance (hours)	L80B10 > 60,000 hours
Driver	Integral
Input voltage	240v
Housing material	Aluminium
Optic material	PMMA Clear Lens / Polycarbonate Louvre
Warranty	7 years
Country of origin	Australia
Weight	0.7 kg

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Configurator

How to specify

Select from the available options to configure luminaire

VLT27.638.____.____.____.____.____.____

Output

300 14W 1321lm - 1442lm
400 18W 1722lm - 1907lm
500 22W 2084lm - 2273lm

Optic

58 58°

CRI CCT

927 90+ 2700K
93 90+ 3000K
935 90+ 3500K
94 90+ 4000K

Dimming

61 Non Dim
66 DALI
68 Bluetooth (Casambi)

Housing colour

W White
B Black
X Custom

Options

Louvre
W White Louvre
B Black Louvre

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.

Colour Options

Housing colour

White
W

Black
B

Custom
X

Options

White Louvre
W

Black Louvre
B

We reserve the right to make technical and design changes. All photometric, spectrometric and electrical data have a tolerance of ±10%.