

NIGHTFALL LINEAR

LED LINEAR RECESSED DOWNLIGHT



- 90+ CRI
- 15°, 30°, 45°
- 3000K or 4000K
- L90B10 up to 50,000 hours
- 3 X SDCM
- 4 sizes

NFL2 – 700mA

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
NFL2.700.15.93.61	NFL2.700.15.93.63	NFL2.700.15.93.66	15°	3000K	260	5
NFL2.700.15.94.61	NFL2.700.15.94.63	NFL2.700.15.94.66	15°	4000K	280	5
NFL2.700.30.93.61	NFL2.700.30.93.63	NFL2.700.30.93.66	30°	3000K	260	5
NFL2.700.30.94.61	NFL2.700.30.94.63	NFL2.700.30.94.66	30°	4000K	280	5
NFL2.700.45.93.61	NFL2.700.45.93.63	NFL2.700.45.93.66	45°	3000K	260	5
NFL2.700.45.94.61	NFL2.700.45.94.63	NFL2.700.45.94.66	45°	4000K	280	5

NFL5 – 700mA

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
NFL5.700.15.93.61	NFL5.700.15.93.63	NFL5.700.15.93.66	15°	3000K	597	11
NFL5.700.15.94.61	NFL5.700.15.94.63	NFL5.700.15.94.66	15°	4000K	608	11
NFL5.700.30.93.61	NFL5.700.30.93.63	NFL5.700.30.93.66	30°	3000K	597	11
NFL5.700.30.94.61	NFL5.700.30.94.63	NFL5.700.30.94.66	30°	4000K	608	11
NFL5.700.45.93.61	NFL5.700.45.93.63	NFL5.700.45.93.66	45°	3000K	597	11
NFL5.700.45.94.61	NFL5.700.45.94.63	NFL5.700.45.94.66	45°	4000K	608	11

NFL10 – 700mA

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
NFL10.700.15.93.61	NFL10.700.15.93.63	NFL10.700.15.93.66	15°	3000K	1344	24
NFL10.700.15.94.61	NFL10.700.15.94.63	NFL10.700.15.94.66	15°	4000K	1378	24
NFL10.700.30.93.61	NFL10.700.30.93.63	NFL10.700.30.93.66	30°	3000K	1344	24
NFL10.700.30.94.61	NFL10.700.30.94.63	NFL10.700.30.94.66	30°	4000K	1378	24
NFL10.700.45.93.61	NFL10.700.45.93.63	NFL10.700.45.93.66	45°	3000K	1344	24
NFL10.700.45.94.61	NFL10.700.45.94.63	NFL10.700.45.94.66	45°	4000K	1378	24

NFL15 – 700mA

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
NFL15.700.15.93.61	NFL15.700.15.93.63	NFL15.700.15.93.66	15°	3000K	1951	34.5
NFL15.700.15.94.61	NFL15.700.15.94.63	NFL15.700.15.94.66	15°	4000K	1990	34.5
NFL15.700.30.93.61	NFL15.700.30.93.63	NFL15.700.30.93.66	30°	3000K	1951	34.5
NFL15.700.30.94.61	NFL15.700.30.94.63	NFL15.700.30.94.66	30°	4000K	1990	34.5
NFL15.700.45.93.61	NFL15.700.45.93.63	NFL15.700.45.93.66	45°	3000K	1951	34.5
NFL15.700.45.94.61	NFL15.700.45.94.63	NFL15.700.45.94.66	45°	4000K	1990	34.5


outputs based on 45° reflector

Trim Finishes


Black




White




NIGHTFALL LINEAR 2




NIGHTFALL LINEAR 5

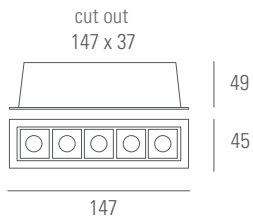

NIGHTFALL LINEAR 10

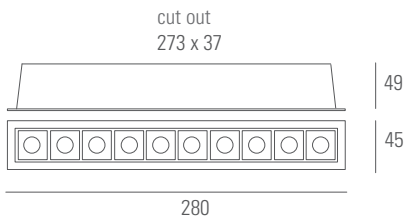

NIGHTFALL LINEAR 15

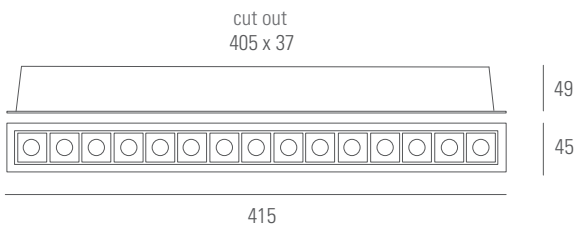

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

