


- IP65
- Die-cast aluminium frame and body with high corrosion resistance
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Frosted glass diffuser
- housing is powder coated with high corrosion resistance and chemical chromatised protection
- Optional DALI dimmable
- 48v - power supply not included - order separately

**ORDERING GUIDE**

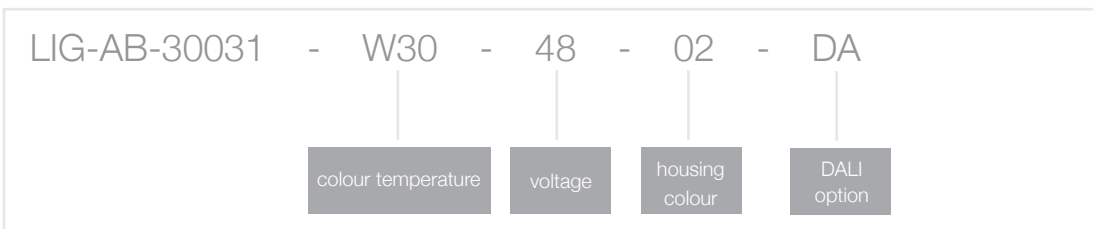

**ABACUS**


Model name	Model number	Lumens	Watts	Beam	Colour Temperature		Weight
					W30	W40	
ABACUS 6	LIG-AB-30031-	323	7	91°x54°	3000K / 4000K		0.9kg
ABACUS 7	LIG-AB-30041-	329	7	92°x55°	3000K / 4000K		0.9kg



**COLOUR GUIDE**

- 01  
 BLACK  
 RAL9011
- 02  
 DARK GREY  
 RAL7043
- 03  
 WHITE  
 RAL9003
- 05  
 MATT SILVER  
 RAL9006
- 06  
 BRONZE  
 RAL6014

## ABACUS 6


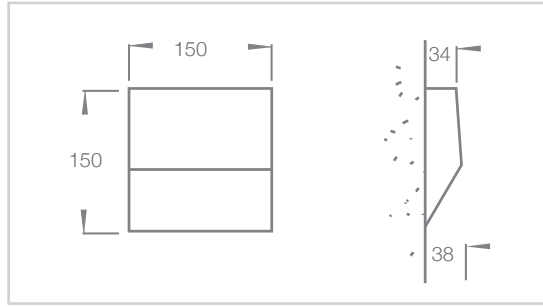


### POWER SUPPLY & VOLTAGE DROP GUIDE

Power supply	maximum number of luminaires	maximum cable length			
		1.0mm	1.5mm	2.5mm	4.0mm
75W	9	22M	33M	55M	88M
150W	18	11M	16M	27M	44M
240W	30	6M	9M	15M	24M
320W	40	5M	7M	12M	20M

This table is a guide only. Power supply not included and must be ordered separately based on individual job requirements.

## ABACUS 7

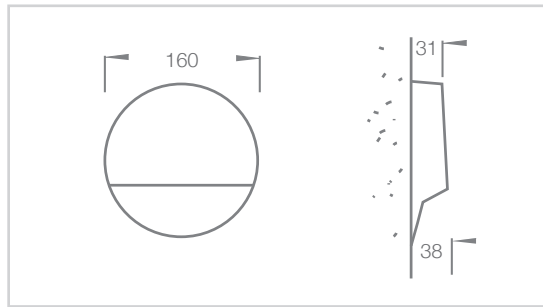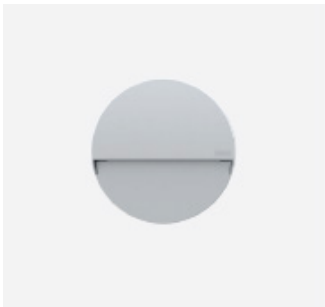

### POWER SUPPLY & VOLTAGE DROP GUIDE

Power supply	maximum number of luminaires	maximum cable length			
		1.0mm	1.5mm	2.5mm	4.0mm
75W	9	22M	33M	55M	88M
150W	18	11M	16M	27M	44M
240W	30	6M	9M	15M	24M
320W	40	5M	7M	12M	20M

This table is a guide only. Power supply not included and must be ordered separately based on individual job requirements.

## ACCESSORIES



GVK\_KGEL  
IP68 GEL CONNECTOR

**Street Address:**  
39 Tinning Street, Brunswick,  
Victoria, 3056, Australia

**Postal Address:**  
PO BOX 5084  
Moreland West VIC 3055

T +61 3 9222 5522  
[www.elslighting.com.au](http://www.elslighting.com.au)

