

ADL110 SURFACE

BLUETOOTH CONTROLLABLE SURFACE MOUNTED LED DOWNLIGHT



- Xicato XIM Gen4 technology
- Bluetooth enabled
- Standard CRI 83+ or Artist high CRI 98
- 3000K, 4000K or 2700K upon request
- High quality, mirror finish low glare reflector
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Made in Australia
- Supplied with 48v integral power supply
- L70B0 at 55,000 hours

XIM GEN4 BLE 48V – 83+ CRI

| DALI Dimmable | Bluetooth Dimmable | Beam | CCT | Lumens | Watts |
|----------------------|----------------------|------|-------|--------|-------|
| ADL110.XB48.M.83.66S | ADL110.XB48.M.83.67S | 31° | 3000K | 867 | 12 |
| ADL110.XB48.M.84.66S | ADL110.XB48.M.84.67S | 31° | 4000K | 867 | 12 |
| ADL110.XB48.W.83.66S | ADL110.XB48.W.83.67S | 55° | 3000K | 888 | 12 |
| ADL110.XB48.W.84.66S | ADL110.XB48.W.84.67S | 55° | 4000K | 888 | 12 |

XIM GEN4 BLE 48V – 98 CRI


| DALI Dimmable | Bluetooth Dimmable | Beam | CCT | Lumens | Watts |
|----------------------|----------------------|------|-------|--------|-------|
| ADL110.XB48.M.93.66S | ADL110.XB48.M.93.67S | 31° | 3000K | 609 | 11.5 |
| ADL110.XB48.M.94.66S | ADL110.XB48.M.94.67S | 31° | 4000K | 609 | 11.5 |
| ADL110.XB48.W.93.66S | ADL110.XB48.W.93.67S | 55° | 3000K | 540 | 11.5 |
| ADL110.XB48.W.94.66S | ADL110.XB48.W.94.67S | 55° | 4000K | 540 | 11.5 |

COLOUR FINISH


 white textured powdercoat - WH

 silver textured powdercoat - SIL

 black textured powdercoat - BLK


 custom powdercoat colour

PHOTOMETRICS

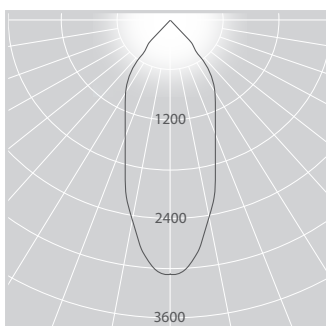

ADL110.XB48.M.83.675

DIMENSIONS

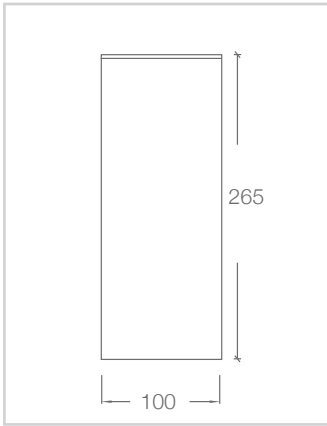

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

