



- IP68
- Aluminum housing and extruded aluminium column with high corrosion resistance
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Powder coating with high corrosion resistance and chemical chromatised protection
- Optional DALI dimmable
- 48v - power supply not included - order separately

ORDERING GUIDE



BENTON

Model name	Model number	Lumens	Watts	Beam	Colour Temperature		Weight
					W30	W40	
BENTON 1	LIG-BE-10001-	1094	21	76°	3000K / 4000K		7.0kg

ACCESSORIES




GVK_KGEL
 IP68 GEL CONNECTOR

COLOUR GUIDE

- 01 BLACK RAL9011
- 02 DARK GREY RAL7043
- 03 WHITE RAL9003
- 05 MATT SILVER RAL9006
- 06 BRONZE RAL6014

BENTON 1

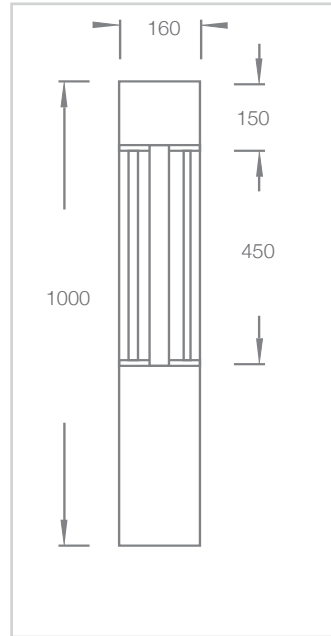

POWER SUPPLY & VOLTAGE DROP GUIDE

Power supply	maximum number of luminaires	maximum cable length			
		1.0mm	1.5mm	2.5mm	4.0mm
75W	3	90M	135M	220M	350M
150W	6	45M	67M	110M	170M
240W	10	28M	42M	70M	110M
320W	13	21M	31M	52M	84M

This table is a guide only. Power supply not included and must be ordered separately based on individual job requirements.

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

