

# DISPLAY SPOT 110

BLUETOOTH CONTROLLABLE ADJUSTABLE LED DOWNLIGHT



- XICATO XTM or XIM Gen 4 LED technology
- Rotatable and adjustable
- Die cast aluminium trim, powdercoated white
- Aluminium reflector and internal lens
- 3000K, 4000K or 2700K upon request
- Ceiling mounted without tools
- Standard CRI 83+ or Artist high CRI 98
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Supplied with 48v remote power supply
- L70B0FO @ 55,000 hours

## XIM GEN4 BLE 48V – 83+ CRI - LOW OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
DS110.XBL48.N.8030.66	DS110.XBL48.N.8030.67	27°	3000K	650	11
DS110.XBL48.N.8040.66	DS110.XBL48.N.8040.67	27°	4000K	650	11
DS110.XBL48.M.8030.66	DS110.XBL48.M.8030.67	35°	3000K	714	11
DS110.XBL48.M.8040.66	DS110.XBL48.M.8040.67	35°	4000K	714	11
DS110.XBL48.W.8030.66	DS110.XBL48.W.8030.67	44°	3000K	668	11
DS110.XBL48.W.8040.66	DS110.XBL48.W.8040.67	44°	4000K	668	11

## XIM GEN4 BLE 48V – 83+ CRI - HIGH OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
DS110.XB48.N.8030.66	DS110.XB48.N.8030.67	27°	3000K	934	15
DS110.XB48.N.8040.66	DS110.XB48.N.8040.67	27°	4000K	934	15
DS110.XB48.M.8030.66	DS110.XB48.M.8030.67	35°	3000K	1020	15
DS110.XB48.M.8040.66	DS110.XB48.M.8040.67	35°	4000K	1020	15
DS110.XB48.W.8030.66	DS110.XB48.W.8030.67	44°	3000K	954	15
DS110.XB48.W.8040.66	DS110.XB48.W.8040.67	44°	4000K	954	15


## XIM GEN4 BLE 48V – 98 CRI - LOW OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
DS110.XBL48.N.9530.66	DS110.XBL48.N.9530.67	27°	3000K	650	14
DS110.XBL48.N.9540.66	DS110.XBL48.N.9540.67	27°	4000K	650	14
DS110.XBL48.M.9530.66	DS110.XBL48.M.9530.67	35°	3000K	714	14
DS110.XBL48.M.9540.66	DS110.XBL48.M.9540.67	35°	4000K	714	14
DS110.XBL48.W.9530.66	DS110.XBL48.W.9530.67	44°	3000K	668	14
DS110.XBL48.W.9540.66	DS110.XBL48.W.9540.67	44°	4000K	668	14

## XIM GEN4 BLE 48V – 98 CRI - HIGH OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
DS110.XB48.N.9530.66	DS110.XB48.N.9530.67	27°	3000K	934	20
DS110.XB48.N.9540.66	DS110.XB48.N.9540.67	27°	4000K	934	20
DS110.XB48.M.9530.66	DS110.XB48.M.9530.67	35°	3000K	1020	20
DS110.XB48.M.9540.66	DS110.XB48.M.9540.67	35°	4000K	1020	20
DS110.XB48.W.9530.66	DS110.XB48.W.9530.67	44°	3000K	954	20
DS110.XB48.W.9540.66	DS110.XB48.W.9540.67	44°	4000K	954	20

## DIMENSIONS

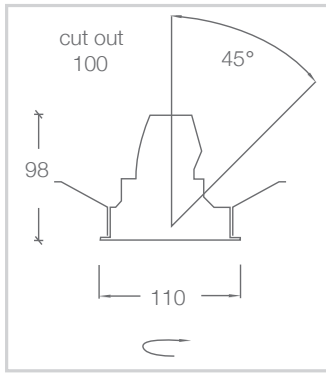

**Street Address:**  
39 Tinning Street, Brunswick,  
Victoria, 3056, Australia

**Postal Address:**  
PO BOX 5084  
Moreland West VIC 3055

T +61 3 9222 5522  
[www.elslighting.com.au](http://www.elslighting.com.au)

