

DISPLAY SPOT 160

BLUETOOTH CONTROLLABLE ADJUSTABLE LED DOWNLIGHT



- XICATO XTM or XIM Gen 4 LED technology
- Rotatable and adjustable
- Die cast aluminium trim, powdercoated white
- Aluminium reflector and internal lens
- 3000K, 4000K or 2700K upon request
- Ceiling mounted without tools
- Standard CRI 83+ or Artist CRI 98
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Supplied with 48v remote power supply
- L70B0FO @ 55,000 hours

XIM GEN4 BLE 48V – 83+ CRI - LOW OUTPUT

| DALI Dimmable | Bluetooth Dimmable | Beam | CCT | Lumens | Watts |
|-----------------------|-----------------------|------|-------|--------|-------|
| DS160.XBL48.N.8030.66 | DS160.XBL48.N.8030.67 | 18° | 3000K | 1775 | 25 |
| DS160.XBL48.N.8040.66 | DS160.XBL48.N.8040.67 | 18° | 4000K | 1775 | 25 |
| DS160.XBL48.M.8030.66 | DS160.XBL48.M.8030.67 | 28° | 3000K | 1785 | 25 |
| DS160.XBL48.M.8040.66 | DS160.XBL48.M.8040.67 | 28° | 4000K | 1785 | 25 |
| DS160.XBL48.W.8030.66 | DS160.XBL48.W.8030.67 | 37° | 3000K | 1785 | 25 |
| DS160.XBL48.W.8040.66 | DS160.XBL48.W.8040.67 | 37° | 4000K | 1785 | 25 |

XIM GEN4 BLE 48V – 83+ CRI - HIGH OUTPUT

| DALI Dimmable | Bluetooth Dimmable | Beam | CCT | Lumens | Watts |
|----------------------|----------------------|------|-------|--------|-------|
| DS160.XB48.N.8030.66 | DS160.XB48.N.8030.67 | 18° | 3000K | 2535 | 36 |
| DS160.XB48.N.8040.66 | DS160.XB48.N.8040.67 | 18° | 4000K | 2535 | 36 |
| DS160.XB48.M.8030.66 | DS160.XB48.M.8030.67 | 28° | 3000K | 2550 | 36 |
| DS160.XB48.M.8040.66 | DS160.XB48.M.8040.67 | 28° | 4000K | 2550 | 36 |
| DS160.XB48.W.8030.66 | DS160.XB48.W.8030.67 | 37° | 3000K | 2550 | 36 |
| DS160.XB48.W.8040.66 | DS160.XB48.W.8040.67 | 37° | 4000K | 2550 | 36 |


XIM GEN4 BLE 48V – 98 CRI - LOW OUTPUT

| DALI Dimmable | Bluetooth Dimmable | Beam | CCT | Lumens | Watts |
|-----------------------|-----------------------|------|-------|--------|-------|
| DS160.XBL48.N.9530.66 | DS160.XBL48.N.9530.67 | 18° | 3000K | 1775 | 30 |
| DS160.XBL48.N.9540.66 | DS160.XBL48.N.9540.67 | 18° | 4000K | 1775 | 30 |
| DS160.XBL48.M.9530.66 | DS160.XBL48.M.9530.67 | 28° | 3000K | 1785 | 30 |
| DS160.XBL48.M.9540.66 | DS160.XBL48.M.9540.67 | 28° | 4000K | 1785 | 30 |
| DS160.XBL48.W.9530.66 | DS160.XBL48.W.9530.67 | 37° | 3000K | 1785 | 30 |
| DS160.XBL48.W.9540.66 | DS160.XBL48.W.9540.67 | 37° | 4000K | 1785 | 30 |

XIM GEN4 BLE 48V – 98 CRI - HIGH OUTPUT

| DALI Dimmable | Bluetooth Dimmable | Beam | CCT | Lumens | Watts |
|----------------------|----------------------|------|-------|--------|-------|
| DS160.XB48.N.9530.66 | DS160.XB48.N.9530.67 | 18° | 3000K | 2535 | 42 |
| DS160.XB48.N.9540.66 | DS160.XB48.N.9540.67 | 18° | 4000K | 2535 | 42 |
| DS160.XB48.M.9530.66 | DS160.XB48.M.9530.67 | 28° | 3000K | 2550 | 42 |
| DS160.XB48.M.9540.66 | DS160.XB48.M.9540.67 | 28° | 4000K | 2550 | 42 |
| DS160.XB48.W.9530.66 | DS160.XB48.W.9530.67 | 37° | 3000K | 2550 | 42 |
| DS160.XB48.W.9540.66 | DS160.XB48.W.9540.67 | 37° | 4000K | 2550 | 42 |

DIMENSIONS

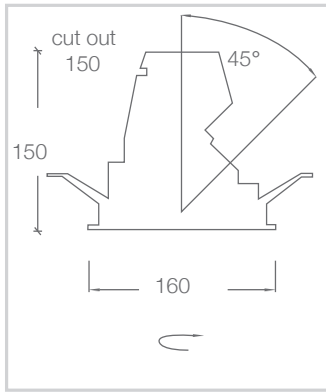

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

