




- IP65
- Low copper content die-cast aluminium housing
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- High efficiency optical PMMA
- Clear toughened glass
- Single cable entry
- Housing is treated with a chemical chromatised protection before powder coating, ensuring high corrosion resistance
- Optional DALI dimmable
- 48v - power supply not included - order separately

ORDERING GUIDE

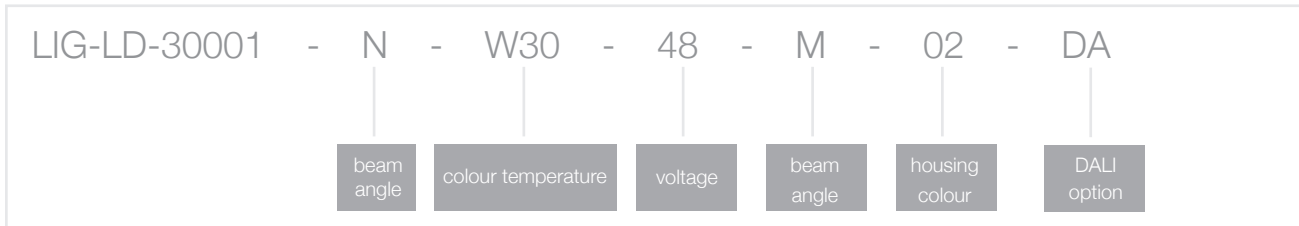

LADOR

Model name	Model number	Lumens	Watts	Beam					Colour Temperature			Weight
				N	M	W	VW	E	W27	W30	W40	
LADOR 5	LIG-LD-30001-	190	4	11°	18°	31°	60°	12°x43°			2700K / 3000K / 4000K	0.8kg
LADOR 6	LIG-LD-30011-	799	11	11°	18°	31°	60°	12°x43°			2700K / 3000K / 4000K	1.1kg

ACCESSORIES




GVK_KGEL
 IP68 GEL CONNECTOR

COLOUR GUIDE

01 BLACK RAL9011	02 DARK GREY RAL7043	03 WHITE RAL9003	05 MATT SILVER RAL9006	06 BRONZE RAL6014
------------------------	----------------------------	------------------------	------------------------------	-------------------------

LADOR 5

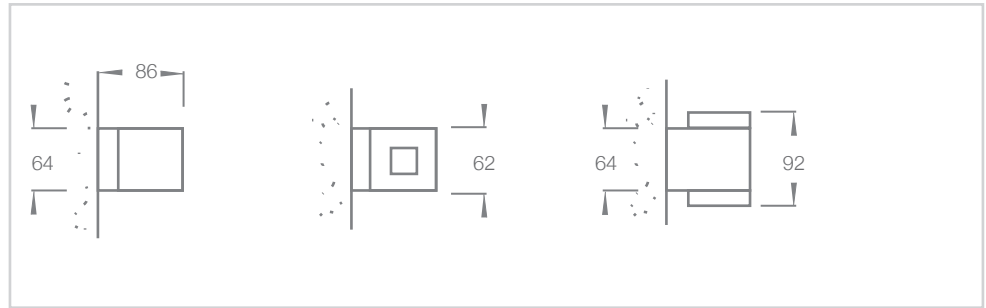


POWER SUPPLY & VOLTAGE DROP GUIDE

Power supply	maximum number of luminaires	maximum cable length			
		1.0mm	1.5mm	2.5mm	4.0mm
75W	15	13M	19M	32M	52M
150W	30	6M	10M	16M	25M
240W	48	4M	6M	10M	16M

This table is a guide only. Power supply not included and must be ordered separately based on individual job requirements.

LADOR 6

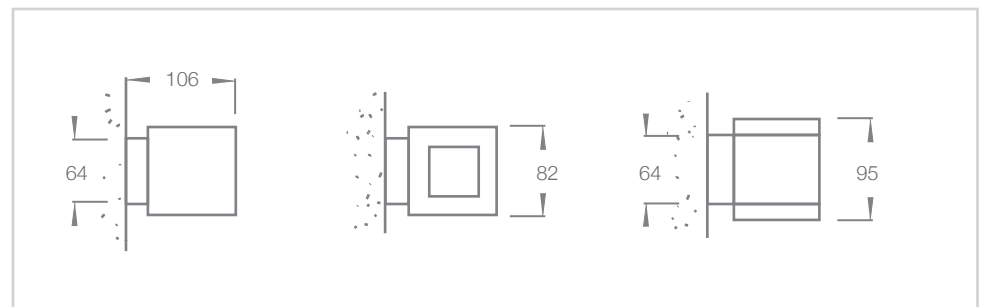

POWER SUPPLY & VOLTAGE DROP GUIDE

Power supply	maximum number of luminaires	maximum cable length			
		1.0mm	1.5mm	2.5mm	4.0mm
75W	4	50M	75M	125M	200M
150W	12	16M	24M	40M	64M
240W	19	10M	15M	25M	40M
320W	25	8M	12M	20M	32M

This table is a guide only. Power supply not included and must be ordered separately based on individual job requirements.

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

