

# SML330 CEILING LIGHT

DIFFUSED LED CEILING LIGHT



- 3 outputs available
- 3000K or 4000K
- CRI >80
- Die cast aluminium base powdercoated
- Injection moulded polycarbonate lens
- Available in white, black or silver base (custom colours available upon request)
- Made in Australia
- IPX4 version available

## SML330 LED

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	CCT	Lumens	Watts
SML330.24.3000.61	SML330.24.3000.63	SML330.24.3000.66	3000K	1682	22
SML330.24.4000.61	SML330.24.4000.63	SML330.24.4000.66	4000K	1682	20
SML330.35.3000.61	SML330.35.3000.63	SML330.35.3000.66	3000K	2319	30
SML330.35.4000.61	SML330.35.4000.63	SML330.35.4000.66	4000K	2319	27
SML330.38.3000.61	-	SML330.38.3000.66	3000K	3285	35
SML330.38.4000.61	-	SML330.38.3000.66	4000K	3285	35

## IPX4 VERSION

To specify the product as IPX4 add .IP to the end of the part code

## COLOUR FINISH

white - WH


silver - SIL

black - BLK




custom powdercoat colour


## PHOTOMETRICS



SML330.24.3000.61





SML330.35.3000.61



SML330.38.3000.61

## DIMENSIONS

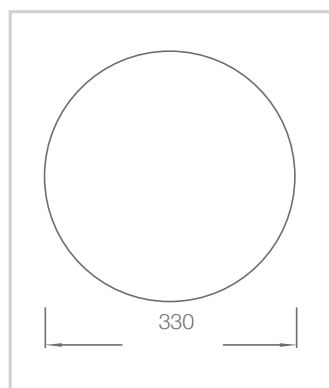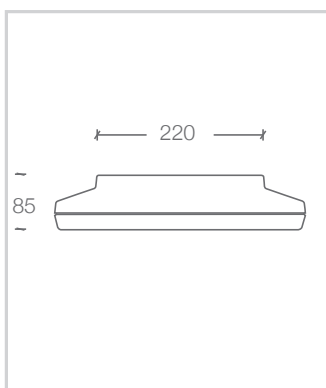

**Street Address:**  
39 Tinning Street, Brunswick,  
Victoria, 3056, Australia

**Postal Address:**  
PO BOX 5084  
Moreland West VIC 3055

T +61 3 9222 5522  
[www.elslighting.com.au](http://www.elslighting.com.au)

