

ADL90 PENDANT

LED PENDANT



- Xicato XTM technology
- Standard CRI 83+ or Artist high CRI 98
- 3000K, 4000K or 2700K upon request
- Aluminium body, powdercoated
- High quality, mirror finish low glare reflector
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Made in Australia
- 1mtr standard drop
- L70B0 at 55,000 hours
- Available in a Bluetooth dimmable version refer to Smart Lighting Catalogue

XTM 240V – 83+ CRI – LOW OUTPUT

| Non Dimmable | Trailing Edge Dimmable | DALI Dimmable | Beam | CCT | Lumens | Watts |
|----------------------|------------------------|----------------------|------|-------|--------|-------|
| ADL90.XTM5N.8030.61P | ADL90.XTM5N.8030.63P | ADL90.XTM5N.8030.66P | 21° | 3000K | 832 | 8 |
| ADL90.XTM5N.8040.61P | ADL90.XTM5N.8040.63P | ADL90.XTM5N.8040.66P | 21° | 4000K | 832 | 8 |
| ADL90.XTM5M.8030.61P | ADL90.XTM5M.8030.63P | ADL90.XTM5M.8030.66P | 35° | 3000K | 795 | 8 |
| ADL90.XTM5M.8040.61P | ADL90.XTM5M.8040.63P | ADL90.XTM5M.8040.66P | 35° | 4000K | 795 | 8 |
| ADL90.XTM5W.8030.61P | ADL90.XTM5W.8030.63P | ADL90.XTM5W.8030.66P | 55° | 3000K | 797 | 8 |
| ADL90.XTM5W.8040.61P | ADL90.XTM5W.8040.63P | ADL90.XTM5W.8040.66P | 55° | 4000K | 797 | 8 |

XTM 240V – 83+ CRI – HIGH OUTPUT

| Non Dimmable | Trailing Edge Dimmable | DALI Dimmable | Beam | CCT | Lumens | Watts |
|----------------------|------------------------|----------------------|------|-------|--------|-------|
| ADL90.XTM7N.8030.61P | ADL90.XTM7N.8030.63P | ADL90.XTM7N.8030.66P | 21° | 3000K | 1125 | 12.5 |
| ADL90.XTM7N.8040.61P | ADL90.XTM7N.8040.63P | ADL90.XTM7N.8040.66P | 21° | 4000K | 1125 | 12.5 |
| ADL90.XTM7M.8030.61P | ADL90.XTM7M.8030.63P | ADL90.XTM7M.8030.66P | 35° | 3000K | 1074 | 12.5 |
| ADL90.XTM7M.8040.61P | ADL90.XTM7M.8040.63P | ADL90.XTM7M.8040.66P | 35° | 4000K | 1074 | 12.5 |
| ADL90.XTM7W.8030.61P | ADL90.XTM7W.8030.63P | ADL90.XTM7W.8030.66P | 55° | 3000K | 1065 | 12.5 |
| ADL90.XTM7W.8040.61P | ADL90.XTM7W.8040.63P | ADL90.XTM7W.8040.66P | 55° | 4000K | 1065 | 12.5 |

XTM 240V – 98 CRI – LOW OUTPUT

| Non Dimmable | Trailing Edge Dimmable | DALI Dimmable | Beam | CCT | Lumens | Watts |
|----------------------|------------------------|----------------------|------|-------|--------|-------|
| ADL90.XTM5N.9530.61P | ADL90.XTM5N.9530.63P | ADL90.XTM5N.9530.66P | 21° | 3000K | 878 | 11.5 |
| ADL90.XTM5N.9540.61P | ADL90.XTM5N.9540.63P | ADL90.XTM5N.9540.66P | 21° | 4000K | 878 | 11.5 |
| ADL90.XTM5M.9530.61P | ADL90.XTM5M.9530.63P | ADL90.XTM5M.9530.66P | 35° | 3000K | 836 | 11.5 |
| ADL90.XTM5M.9540.61P | ADL90.XTM5M.9540.63P | ADL90.XTM5M.9540.66P | 35° | 4000K | 836 | 11.5 |
| ADL90.XTM5W.9530.61P | ADL90.XTM5W.9530.63P | ADL90.XTM5W.9530.66P | 55° | 3000K | 822 | 11.5 |
| ADL90.XTM5W.9540.61P | ADL90.XTM5W.9540.63P | ADL90.XTM5W.9540.66P | 55° | 4000K | 822 | 11.5 |

XTM 240V – 98 CRI – HIGH OUTPUT

| Non Dimmable | Trailing Edge Dimmable | DALI Dimmable | Beam | CCT | Lumens | Watts |
|----------------------|------------------------|----------------------|------|-------|--------|-------|
| ADL90.XTM7N.9530.61P | ADL90.XTM7N.9530.63P | ADL90.XTM7N.9530.66P | 21° | 3000K | 1186 | 16.5 |
| ADL90.XTM7N.9540.61P | ADL90.XTM7N.9540.63P | ADL90.XTM7N.9540.66P | 21° | 4000K | 1186 | 16.5 |
| ADL90.XTM7M.9530.61P | ADL90.XTM7M.9530.63P | ADL90.XTM7M.9530.66P | 35° | 3000K | 1130 | 16.5 |
| ADL90.XTM7M.9540.61P | ADL90.XTM7M.9540.63P | ADL90.XTM7M.9540.66P | 35° | 4000K | 1130 | 16.5 |
| ADL90.XTM7W.9530.61P | ADL90.XTM7W.9530.63P | ADL90.XTM7W.9530.66P | 55° | 3000K | 1111 | 16.5 |
| ADL90.XTM7W.9540.61P | ADL90.XTM7W.9540.63P | ADL90.XTM7W.9540.66P | 55° | 4000K | 1111 | 16.5 |




COLOURED FLEX




pink white black green blue red orange yellow


COLOUR FINISH




PHOTOMETRICS



ADL90.XTM5W.8030.61P




ADL90.XTM7M.8030.61P




ADL90.XTM7W.8030.61P

DIMENSIONS – XTM

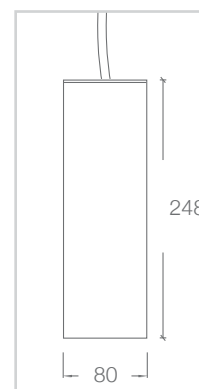

NON DIM

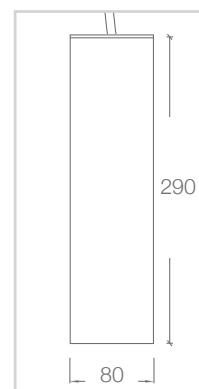

DALI DIM

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

