

ADL90 SURFACE DOWNLIGHT

LED SURFACE MOUNTED DOWNLIGHT



- XICATO XTM technology
- Standard CRI 83+ or Artist high CRI 98
- 3000K, 4000K or 2700K upon request
- High quality, mirror finish low glare reflector
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Made in Australia
- L70B0 at 55,000 hours
- Available in a Bluetooth dimmable version refer to Smart Lighting Catalogue

XTM 240V – 83+ CRI – LOW OUTPUT

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL90.XTM5N.8030.61S	ADL90.XTM5N.8030.63S	ADL90.XTM5N.8030.66S	21°	3000K	832	8
ADL90.XTM5N.8040.61S	ADL90.XTM5N.8040.63S	ADL90.XTM5N.8040.66S	21°	4000K	832	8
ADL90.XTM5M.8030.61S	ADL90.XTM5M.8030.63S	ADL90.XTM5M.8030.66S	35°	3000K	795	8
ADL90.XTM5M.8040.61S	ADL90.XTM5M.8040.63S	ADL90.XTM5M.8040.66S	35°	4000K	795	8
ADL90.XTM5W.8030.61S	ADL90.XTM5W.8030.63S	ADL90.XTM5W.8030.66S	55°	3000K	797	8
ADL90.XTM5W.8040.61S	ADL90.XTM5W.8040.63S	ADL90.XTM5W.8040.66S	55°	4000K	797	8

XTM 240V – 83+ CRI – HIGH OUTPUT

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL90.XTM7N.8030.61S	ADL90.XTM7N.8030.63S	ADL90.XTM7N.8030.66S	21°	3000K	1125	12.5
ADL90.XTM7N.8040.61S	ADL90.XTM7N.8040.63S	ADL90.XTM7N.8040.66S	21°	4000K	1125	12.5
ADL90.XTM7M.8030.61S	ADL90.XTM7M.8030.63S	ADL90.XTM7M.8030.66S	35°	3000K	1074	12.5
ADL90.XTM7M.8040.61S	ADL90.XTM7M.8040.63S	ADL90.XTM7M.8040.66S	35°	4000K	1074	12.5
ADL90.XTM7W.8030.61S	ADL90.XTM7W.8030.63S	ADL90.XTM7W.8030.66S	55°	3000K	1065	12.5
ADL90.XTM7W.8040.61S	ADL90.XTM7W.8040.63S	ADL90.XTM7W.8040.66S	55°	4000K	1065	12.5

XTM 240V – 98 CRI – LOW OUTPUT

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL90.XTM5N.9530.61S	ADL90.XTM5N.9530.63S	ADL90.XTM5N.9530.66S	21°	3000K	878	11.5
ADL90.XTM5N.9540.61S	ADL90.XTM5N.9540.63S	ADL90.XTM5N.9540.66S	21°	4000K	878	11.5
ADL90.XTM5M.9530.61S	ADL90.XTM5M.9530.63S	ADL90.XTM5M.9530.66S	35°	3000K	836	11.5
ADL90.XTM5M.9540.61S	ADL90.XTM5M.9540.63S	ADL90.XTM5M.9540.66S	35°	4000K	836	11.5
ADL90.XTM5W.9530.61S	ADL90.XTM5W.9530.63S	ADL90.XTM5W.9530.66S	55°	3000K	822	11.5
ADL90.XTM5W.9540.61S	ADL90.XTM5W.9540.63S	ADL90.XTM5W.9540.66S	55°	4000K	822	11.5

XTM 240V – 98 CRI – HIGH OUTPUT


Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL90.XTM7N.9530.61S	ADL90.XTM7N.9530.63S	ADL90.XTM7N.9530.66S	21°	3000K	1186	16.5
ADL90.XTM7N.9540.61S	ADL90.XTM7N.9540.63S	ADL90.XTM7N.9540.66S	21°	4000K	1186	16.5
ADL90.XTM7M.9530.61S	ADL90.XTM7M.9530.63S	ADL90.XTM7M.9530.66S	35°	3000K	1130	16.5
ADL90.XTM7M.9540.61S	ADL90.XTM7M.9540.63S	ADL90.XTM7M.9540.66S	35°	4000K	1130	16.5
ADL90.XTM7W.9530.61S	ADL90.XTM7W.9530.63S	ADL90.XTM7W.9530.66S	55°	3000K	1111	16.5
ADL90.XTM7W.9540.61S	ADL90.XTM7W.9540.63S	ADL90.XTM7W.9540.66S	55°	4000K	1111	16.5

COLOUR FINISH


 white - WH

 silver - SIL


 black - BLK

 custom powdercoat colour


PHOTOMETRICS



ADL90.XTM5W.8030.61




ADL90.XTM7M.8030.61.M




ADL90.XTM7W.8030.61

DIMENSIONS - XTM

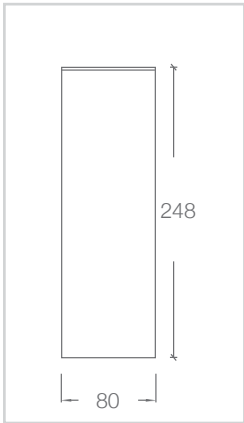

NON DIMMABLE

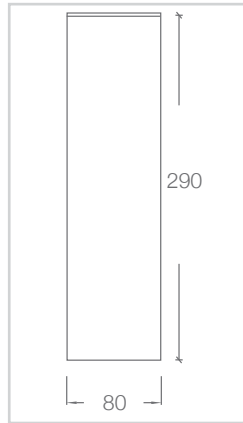

DIMMABLE

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

