




- 80+ CRI or 90+ CRI versions
- Even illumination - no spots
- Flat diffuser or U diffuser
- Custom made lengths
- Integral driver
- 3000K, 4000K or RGB/colour tunable on request
- Optional screwless endcaps
- Registered design no. 201513961

HOW TO ORDER

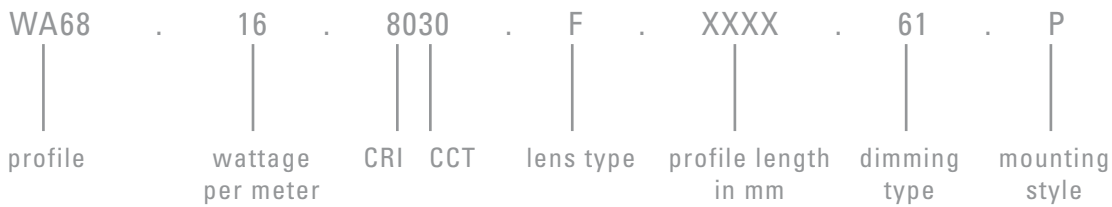

WAVE68 - STANDARD OUTPUT - 80+ CRI


| Non Dimmable | DALI Dimmable | System watts per meter | Absolute lumens per meter | CRI | CCT | Lens | Divisible by |
|------------------------|------------------------|------------------------|---------------------------|-----|-------|------|--------------|
| WA68.16.8030.F.XXXX.61 | WA68.16.8030.F.XXXX.66 | 16 | 1170 | 80+ | 3000K | FLAT | 100mm |
| WA68.16.8030.U.XXXX.61 | WA68.16.8030.U.XXXX.66 | 16 | 1170 | 80+ | 3000K | U | 100mm |
| WA68.16.8040.F.XXXX.61 | WA68.16.8040.F.XXXX.66 | 16 | 1170 | 80+ | 4000K | FLAT | 100mm |
| WA68.16.8040.U.XXXX.61 | WA68.16.8040.U.XXXX.66 | 16 | 1170 | 80+ | 4000K | U | 100mm |

WAVE68 - STANDARD OUTPUT - 90+ CRI

| Non Dimmable | DALI Dimmable | System watts per meter | Absolute lumens per meter | CRI | CCT | Lens | Divisible by |
|------------------------|------------------------|------------------------|---------------------------|-----|-------|------|--------------|
| WA68.34.9030.F.XXXX.61 | WA68.34.9030.F.XXXX.66 | 34 | 1864 | 90+ | 3000K | FLAT | 50mm |
| WA68.34.9030.U.XXXX.61 | WA68.34.9030.U.XXXX.66 | 34 | 1864 | 90+ | 3000K | U | 50mm |
| WA68.34.9040.F.XXXX.61 | WA68.34.9040.F.XXXX.66 | 34 | 1864 | 90+ | 4000K | FLAT | 50mm |
| WA68.34.9040.U.XXXX.61 | WA68.34.9040.U.XXXX.66 | 34 | 1864 | 90+ | 4000K | U | 50mm |

WAVE68 - HIGH OUTPUT - 80+ CRI



| Non Dimmable | DALI Dimmable | System watts per meter | Absolute lumens per meter | CRI | CCT | Lens | Divisible by |
|------------------------|------------------------|------------------------|---------------------------|-----|-------|------|--------------|
| WA68.25.8030.F.XXXX.61 | WA68.25.8030.F.XXXX.66 | 25 | 2428 | 80+ | 3000K | FLAT | 140mm |
| WA68.25.8030.U.XXXX.61 | WA68.25.8030.U.XXXX.66 | 25 | 2428 | 80+ | 3000K | U | 140mm |
| WA68.25.8040.F.XXXX.61 | WA68.25.8040.F.XXXX.66 | 25 | 2428 | 80+ | 4000K | FLAT | 140mm |
| WA68.25.8040.U.XXXX.61 | WA68.25.8040.U.XXXX.66 | 25 | 2428 | 80+ | 4000K | U | 140mm |
| WA68.31.8030.F.XXXX.61 | WA68.31.8030.F.XXXX.66 | 31 | 2990 | 80+ | 3000K | FLAT | 140mm |
| WA68.31.8030.U.XXXX.61 | WA68.31.8030.U.XXXX.66 | 31 | 2990 | 80+ | 3000K | U | 140mm |
| WA68.31.8040.F.XXXX.61 | WA68.31.8040.F.XXXX.66 | 31 | 2990 | 80+ | 4000K | FLAT | 140mm |
| WA68.31.8040.U.XXXX.61 | WA68.31.8040.U.XXXX.66 | 31 | 2990 | 80+ | 4000K | U | 140mm |

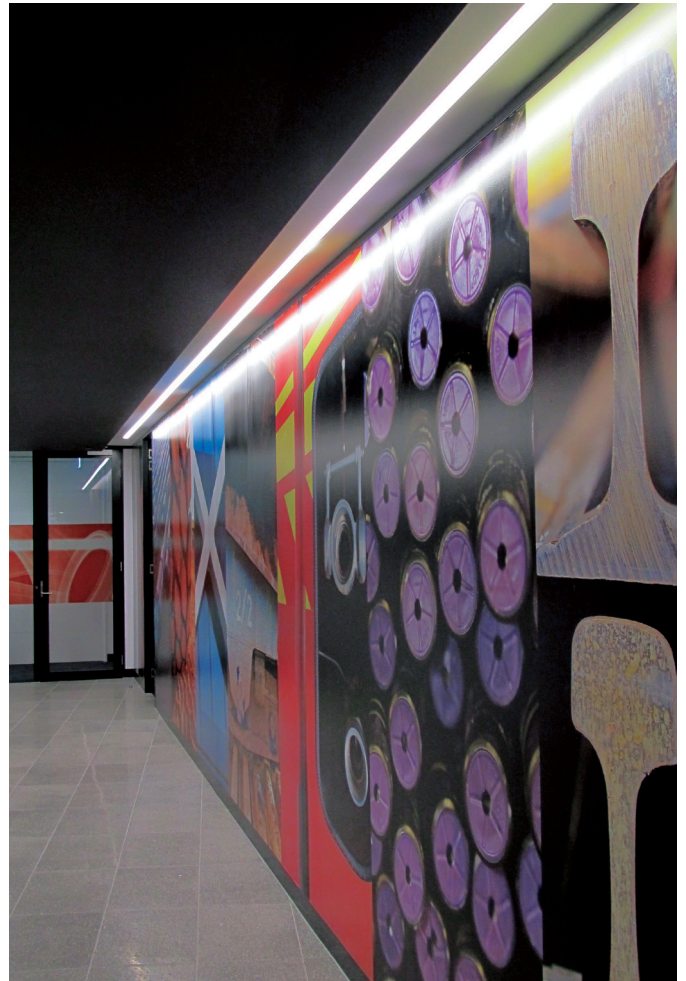


MOUNTING STYLES

S - Surface mounted


P - Pendant - down only



DIMENSIONS



Wave 68
U opal diffuser



Wave 68
flat opal diffuser

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

