

PROTEK Q2

IP65 HIGH OUT - PUT LED FLOODLIGHT



- IP65 rated
- Aluminium housing powdercoated
- Available in 3000K, 4000K or 5700K
- 80° optics, 48° or 150° upon request
- Made in EU

HOW TO ORDER

4330 . 58 . 60 . 85 . DRD
| . | . | . | . |
fitting . body colour . wattage . CCT . accessories

PROTEK Q2

Non Dimmable	CCT.	Lumens	Watts
4330.58.60.83	3000K	4722	60
4330.58.60.84	4000K	4889	60
4330.58.60.85	5000K	5378	60
4330.58.10.83	3000K	7869	100
4330.58.10.84	4000K	8149	100
4330.58.10.85	5000K	8963	100
4330.58.15.83	3000k	11805	150
4330.58.15.84	4000K	12224	150
4330.58.15.85	5000K	13145	150
4330.58.20.83	3000K	15739	200
4330.58.20.84	4000K	16298	200
4330.58.20.85	5000K	17927	200

OPTIONAL ACCESSORIES

DALI dimmable driver	DRD
Asymmetrical optics	3407
48° optics	3409
150° optics	3421


BODY COLOUR

Dark grey	58
Black	02
White	01

CCT

3000K	83
4000K	84
5000K	85

DIMENSIONS

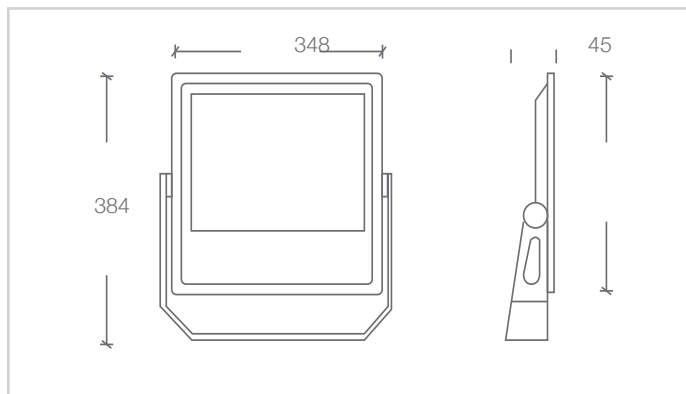

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

