

- 80+ CRI or 90+ CRI versions
- Even illumination - no spots
- Custom made lengths
- Integral driver
- 3000K, 4000K or RGBW/colour tunable on request

HOW TO ORDER



LOOP 80 SURFACE - STANDARD OUTPUT - 80+ CRI

Non Dimmable	DALI Dimmable	System watts per meter	Absolute lumens per meter	CRI	CCT	Divisible by
LPS80.16.8030.XXXX.61	LPS80.16.8030.XXXX.66	16	1374	80+	3000K	100mm
LPS80.16.8040.XXXX.61	LPS80.16.8040.XXXX.66	16	1374	80+	4000K	100mm

LOOP 80 SURFACE - STANDARD OUTPUT - 90+ CRI

Non Dimmable	DALI Dimmable	System watts per meter	Absolute lumens per meter	CRI	Colour Temp	Divisible by
LPS80.32.9030.XXXX.61	LPS80.32.9030.XXXX.66	32	2157	90+	3000K	50mm
LPS80.32.9040.XXXX.61	LPS80.32.9040.XXXX.66	32	2157	90+	4000K	50mm


LOOP 80 SURFACE - HIGH OUTPUT - 80+ CRI

Non Dimmable	DALI Dimmable	System watts per meter	Absolute lumens per meter	CRI	CCT	Divisible by
LPS80.26.8030.XXXX.61	LPS80.26.8030.XXXX.66	26	2868	80+	3000K	140mm
LPS80.26.8040.XXXX.61	LPS80.26.8040.XXXX.66	26	2868	80+	4000K	140mm
LPS80.33.8030.XXXX.61	LPS80.33.8030.XXXX.66	33	3595	80+	3000K	140mm
LPS80.33.8040.XXXX.61	LPS80.33.8040.XXXX.66	33	3595	80+	4000K	140mm

COLOUR FINISH

 white - WH

 silver - SIL

 black - BLK





custom powdercoat colour


MOUNTING STYLES

S - Surface mounted

P - Pendant mounted



DIMENSIONS

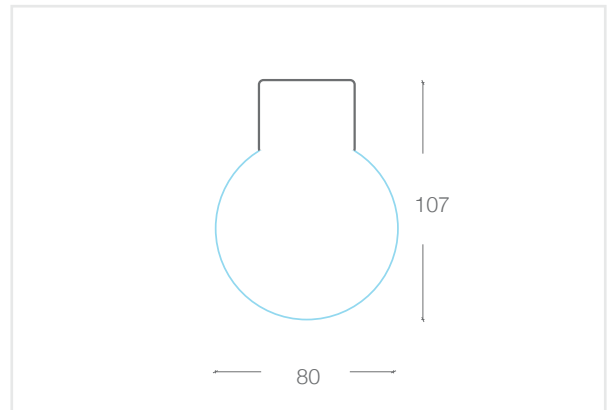

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

