




- Recessed 40x30mm profile with trim
- Small trim to recessing into plaster
- Even illumination - no spots
- 80+ CRI or 90+ CRI versions
- Flat diffuser or U diffuser
- Custom made lengths
- 3000K, 4000K or RGB/colour tunable on request
- Available as IPX4 with flat diffuser (up to 3m length)
- Remote driver

## HOW TO ORDER

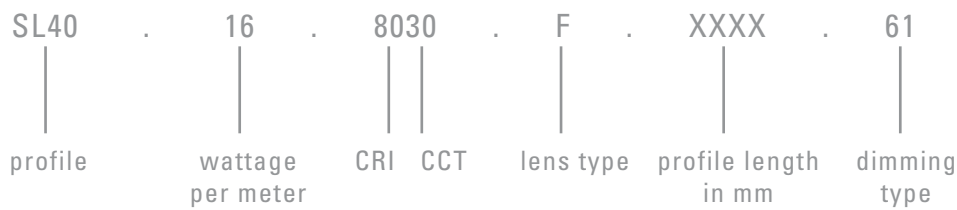


### SL40 - 80+ CRI

Non Dimmable	DALI Dimmable	System watts per meter	Absolute lumens per meter	CRI	CCT	Lens	Divisible by
SL40.5.8030.F.XXXX.61	SL40.5.8030.F.XXXX.66	5	400	80+	3000K	FLAT	100mm
SL40.5.8030.U.XXXX.61	SL40.5.8030.U.XXXX.66	5	400	80+	3000K	U	100mm
SL40.5.8040.F.XXXX.61	SL40.5.8040.F.XXXX.66	5	400	80+	4000K	FLAT	100mm
SL40.5.8040.U.XXXX.61	SL40.5.8040.U.XXXX.66	5	400	80+	4000K	U	100mm
SL40.16.8030.F.XXXX.61	SL40.16.8030.F.XXXX.66	16	1020	80+	3000K	FLAT	100mm
SL40.16.8030.U.XXXX.61	SL40.16.8030.U.XXXX.66	16	1020	80+	3000K	U	100mm
SL40.16.8040.F.XXXX.61	SL40.16.8040.F.XXXX.66	16	1020	80+	4000K	FLAT	100mm
SL40.16.8040.U.XXXX.61	SL40.16.8040.U.XXXX.66	16	1020	80+	4000K	U	100mm

### SL40 - 90+ CRI

Non Dimmable	DALI Dimmable	System watts per meter	Absolute lumens per meter	CRI	CCT	Lens	Divisible by
SL40.34.9030.F.XXXX.61	SL40.34.9030.F.XXXX.66	34	1540	90+	3000K	FLAT	50mm
SL40.34.9030.U.XXXX.61	SL40.34.9030.U.XXXX.66	34	1540	90+	3000K	U	50mm
SL40.34.9040.F.XXXX.61	SL40.34.9040.F.XXXX.66	34	1540	90+	4000K	FLAT	50mm
SL40.34.9040.U.XXXX.61	SL40.34.9040.U.XXXX.66	34	1540	90+	4000K	U	50mm

## DIMENSIONS

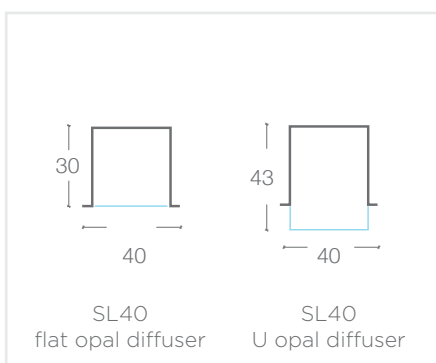

## COLOUR FINISH

 white - WH

 silver - SIL


 black - BLK



custom powdercoat  
colour

## MOUNTING STYLES

Recessed with trim



## IPX4 VERSION

To specify the product as IPX4 add .IP  
to the end of the part code

**Street Address:**  
39 Tinning Street, Brunswick,  
Victoria, 3056, Australia

**Postal Address:**  
PO BOX 5084  
Moreland West VIC 3055

T +61 3 9222 5522  
[www.elslighting.com.au](http://www.elslighting.com.au)

