




- 80+ CRI or 90+ CRI versions
- Even illumination - no spots
- Flat diffuser or U diffuser
- Custom made lengths
- Wall mounting bracket available
- Integral driver
- 3000K, 4000K or RGB/colour tunable on request
- **optional screwless endcaps**

HOW TO ORDER

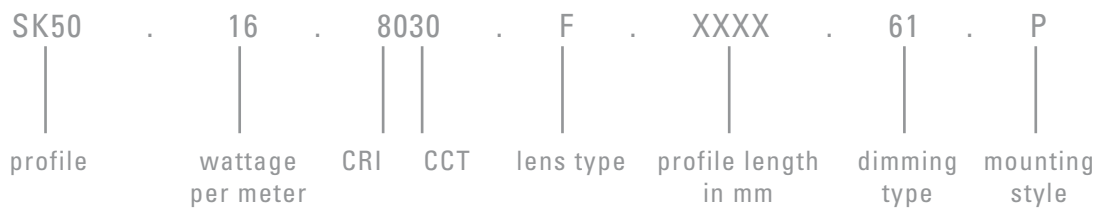

SYSTEMKANAL50 - STANDARD OUTPUT - 80+ CRI

Non Dimmable	DALI Dimmable	System watts per meter	Absolute lumens per meter	CRI	CCT	Lens	Divisible by
SK50.16.8030.F.XXXX.61	SK50.16.8030.F.XXXX.66	16	1170	80+	3000K	FLAT	100mm
SK50.16.8030.U.XXXX.61	SK50.16.8030.U.XXXX.66	16	1170	80+	3000K	U	100mm
SK50.16.8040.F.XXXX.61	SK50.16.8040.F.XXXX.66	16	1170	80+	4000K	FLAT	100mm
SK50.16.8040.U.XXXX.61	SK50.16.8040.U.XXXX.66	16	1170	80+	4000K	U	100mm

SYSTEMKANAL50 - STANDARD OUTPUT - 90+ CRI

Non Dimmable	DALI Dimmable	System watts per meter	Absolute lumens per meter	CRI	CCT	Lens	Divisible by
SK50.34.9030.F.XXXX.61	SK50.34.9030.F.XXXX.66	34	1864	90+	3000K	FLAT	50mm
SK50.34.9030.U.XXXX.61	SK50.34.9030.U.XXXX.66	34	1864	90+	3000K	U	50mm
SK50.34.9040.F.XXXX.61	SK50.34.9040.F.XXXX.66	34	1864	90+	4000K	FLAT	50mm
SK50.34.9040.U.XXXX.61	SK50.34.9040.U.XXXX.66	34	1864	90+	4000K	U	50mm

SYSTEMKANAL50 - HIGH OUTPUT - 80+ CRI

Non Dimmable	DALI Dimmable	System watts per meter	Absolute lumens per meter	CRI	CCT	Lens	Divisible by
SK50.25.8030.F.XXXX.61	SK50.25.8030.F.XXXX.66	25	2428	80+	3000K	FLAT	140mm
SK50.25.8030.U.XXXX.61	SK50.25.8030.U.XXXX.66	25	2428	80+	3000K	U	140mm
SK50.25.8040.F.XXXX.61	SK50.25.8040.F.XXXX.66	25	2428	80+	4000K	FLAT	140mm
SK50.25.8040.U.XXXX.61	SK50.25.8040.U.XXXX.66	25	2428	80+	4000K	U	140mm
SK50.31.8030.F.XXXX.61	SK50.31.8030.F.XXXX.66	31	2990	80+	3000K	FLAT	140mm
SK50.31.8030.U.XXXX.61	SK50.31.8030.U.XXXX.66	31	2990	80+	3000K	U	140mm
SK50.31.8040.F.XXXX.61	SK50.31.8040.F.XXXX.66	31	2990	80+	4000K	FLAT	140mm
SK50.31.8040.U.XXXX.61	SK50.31.8040.U.XXXX.66	31	2990	80+	4000K	U	140mm




MOUNTING STYLES


S - Surface mounted




P - Pendant - down only







W - Wall mounted

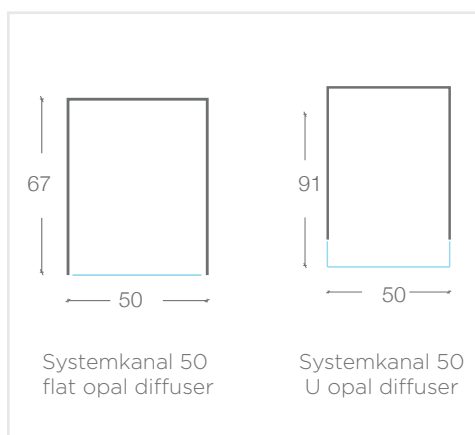

DIMENSIONS



COLOUR FINISH

-  white - WH
-  silver - SIL
-  black - BLK
-  custom powdercoat colour

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

