




- Up down illumination
- 80+ CRI or 90+ CRI versions
- Even illumination - no spots
- Flat diffuser or U diffuser
- Custom made lengths
- Rod suspended or wire suspended
- Wall mounting bracket available
- 3000K, 4000K or RGBW/colour tunable on request
- Integral driver
- **Optional screwless endcaps**

## HOW TO ORDER

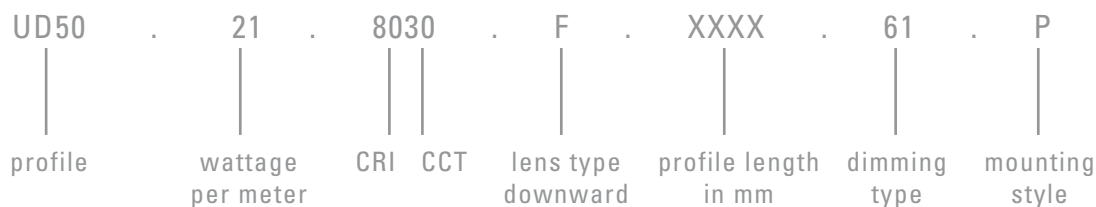

### UP DOWN50 - STANDARD OUTPUT - 80+ CRI

Non Dimmable	DALI Dimmable	System watts per meter (up + down)	Absolute lm per meter (up)	Absolute lm per meter (down)	CRI	CCT	Down Lens	Divisible by
UD50.21.8030.F.XXXX.61	UD50.21.8030.F.XXXX.66	21	430	1170	80+	3000K	FLAT	100mm
UD50.21.8030.U.XXXX.61	UD50.21.8030.U.XXXX.66	21	430	1170	80+	3000K	U	100mm
UD50.21.8040.F.XXXX.61	UD50.21.8040.F.XXXX.66	21	430	1170	80+	4000K	FLAT	100mm
UD50.21.8040.U.XXXX.61	UD50.21.8040.U.XXXX.66	21	430	1170	80+	4000K	U	100mm

### UP DOWN50 - STANDARD OUTPUT - 90+ CRI (80+ CRI UP)

Non Dimmable	DALI Dimmable	System watts per meter (up + down)	Absolute lm per meter (up)	Absolute lm per meter (down)	CRI	CCT	Down Lens	Divisible by
UD50.39.9030.F.XXXX.61	UD50.39.9030.F.XXXX.66	39	430	1864	90+	3000K	FLAT	50mm
UD50.39.9030.U.XXXX.61	UD50.39.9030.U.XXXX.66	39	430	1864	90+	3000K	U	50mm
UD50.39.9040.F.XXXX.61	UD50.39.9040.F.XXXX.66	39	430	1864	90+	4000K	FLAT	50mm
UD50.39.9040.U.XXXX.61	UD50.39.9040.U.XXXX.66	39	430	1864	90+	4000K	U	50mm

### UP DOWN50 - HIGH OUTPUT - 80+ CRI

Non Dimmable	DALI Dimmable	System watts per meter (up + down)	Absolute lm per meter (up)	Absolute lm per meter (down)	CRI	CCT	Down Lens	Divisible by
UD50.30.8030.F.XXXX.61	UD50.30.8030.F.XXXX.66	30	430	2428	80+	3000K	FLAT	140mm
UD50.30.8030.U.XXXX.61	UD50.30.8030.U.XXXX.66	30	430	2428	80+	3000K	U	140mm
UD50.30.8040.F.XXXX.61	UD50.30.8040.F.XXXX.66	30	430	2428	80+	4000K	FLAT	140mm
UD50.30.8040.U.XXXX.61	UD50.30.8040.U.XXXX.66	30	430	2428	80+	4000K	U	140mm
UD50.36.8030.F.XXXX.61	UD50.36.8030.F.XXXX.66	36	430	2990	80+	3000K	FLAT	140mm
UD50.36.8030.U.XXXX.61	UD50.36.8030.U.XXXX.66	36	430	2990	80+	3000K	U	140mm
UD50.36.8040.F.XXXX.61	UD50.36.8040.F.XXXX.66	36	430	2990	80+	4000K	FLAT	140mm
UD50.36.8040.U.XXXX.61	UD50.36.8040.U.XXXX.66	36	430	2990	80+	4000K	U	140mm

## COLOUR FINISH

 white - WH

 silver - SIL

 black - BLK





custom powdercoat colour


## MOUNTING STYLES

P - Pendant - up/down

W - Wall mounted - up/down



## DIMENSIONS

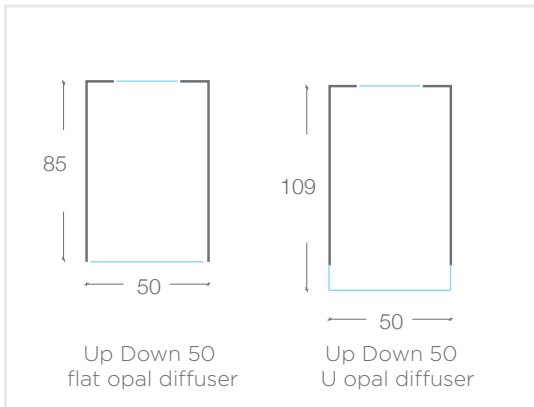

**Street Address:**  
39 Tinning Street, Brunswick,  
Victoria, 3056, Australia

**Postal Address:**  
PO BOX 5084  
Moreland West VIC 3055

T +61 3 9222 5522  
[www.elslighting.com.au](http://www.elslighting.com.au)

