




- Up down illumination
- 80+ CRI or 90+ CRI versions
- Even illumination - no spots
- Flat diffuser or U diffuser
- Custom made lengths
- Rod suspended or wire suspended
- Wall mounting bracket available
- 3000K, 4000K or RGBW/colour tunable on request
- Integral driver
- **Optional screwless endcaps**

HOW TO ORDER

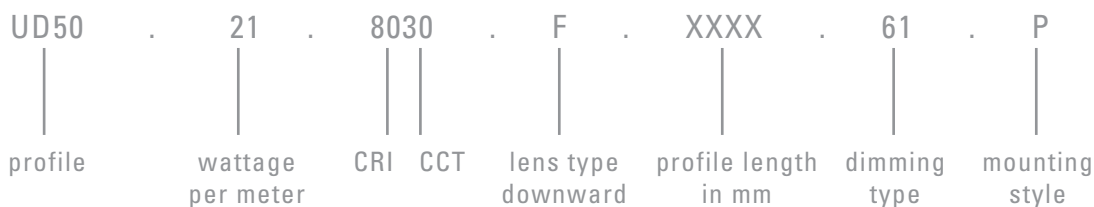

UP DOWN50 - STANDARD OUTPUT - 80+ CRI

| Non Dimmable | DALI Dimmable | System watts per meter (up + down) | Absolute lm per meter (up) | Absolute lm per meter (down) | CRI | CCT | Down Lens | Divisible by |
|------------------------|------------------------|------------------------------------|----------------------------|------------------------------|-----|-------|-----------|--------------|
| UD50.21.8030.F.XXXX.61 | UD50.21.8030.F.XXXX.66 | 21 | 430 | 1170 | 80+ | 3000K | FLAT | 100mm |
| UD50.21.8030.U.XXXX.61 | UD50.21.8030.U.XXXX.66 | 21 | 430 | 1170 | 80+ | 3000K | U | 100mm |
| UD50.21.8040.F.XXXX.61 | UD50.21.8040.F.XXXX.66 | 21 | 430 | 1170 | 80+ | 4000K | FLAT | 100mm |
| UD50.21.8040.U.XXXX.61 | UD50.21.8040.U.XXXX.66 | 21 | 430 | 1170 | 80+ | 4000K | U | 100mm |

UP DOWN50 - STANDARD OUTPUT - 90+ CRI (80+ CRI UP)

| Non Dimmable | DALI Dimmable | System watts per meter (up + down) | Absolute lm per meter (up) | Absolute lm per meter (down) | CRI | CCT | Down Lens | Divisible by |
|------------------------|------------------------|------------------------------------|----------------------------|------------------------------|-----|-------|-----------|--------------|
| UD50.39.9030.F.XXXX.61 | UD50.39.9030.F.XXXX.66 | 39 | 430 | 1864 | 90+ | 3000K | FLAT | 50mm |
| UD50.39.9030.U.XXXX.61 | UD50.39.9030.U.XXXX.66 | 39 | 430 | 1864 | 90+ | 3000K | U | 50mm |
| UD50.39.9040.F.XXXX.61 | UD50.39.9040.F.XXXX.66 | 39 | 430 | 1864 | 90+ | 4000K | FLAT | 50mm |
| UD50.39.9040.U.XXXX.61 | UD50.39.9040.U.XXXX.66 | 39 | 430 | 1864 | 90+ | 4000K | U | 50mm |

UP DOWN50 - HIGH OUTPUT - 80+ CRI


| Non Dimmable | DALI Dimmable | System watts per meter (up + down) | Absolute lm per meter (up) | Absolute lm per meter (down) | CRI | CCT | Down Lens | Divisible by |
|------------------------|------------------------|------------------------------------|----------------------------|------------------------------|-----|-------|-----------|--------------|
| UD50.30.8030.F.XXXX.61 | UD50.30.8030.F.XXXX.66 | 30 | 430 | 2428 | 80+ | 3000K | FLAT | 140mm |
| UD50.30.8030.U.XXXX.61 | UD50.30.8030.U.XXXX.66 | 30 | 430 | 2428 | 80+ | 3000K | U | 140mm |
| UD50.30.8040.F.XXXX.61 | UD50.30.8040.F.XXXX.66 | 30 | 430 | 2428 | 80+ | 4000K | FLAT | 140mm |
| UD50.30.8040.U.XXXX.61 | UD50.30.8040.U.XXXX.66 | 30 | 430 | 2428 | 80+ | 4000K | U | 140mm |
| UD50.36.8030.F.XXXX.61 | UD50.36.8030.F.XXXX.66 | 36 | 430 | 2990 | 80+ | 3000K | FLAT | 140mm |
| UD50.36.8030.U.XXXX.61 | UD50.36.8030.U.XXXX.66 | 36 | 430 | 2990 | 80+ | 3000K | U | 140mm |
| UD50.36.8040.F.XXXX.61 | UD50.36.8040.F.XXXX.66 | 36 | 430 | 2990 | 80+ | 4000K | FLAT | 140mm |
| UD50.36.8040.U.XXXX.61 | UD50.36.8040.U.XXXX.66 | 36 | 430 | 2990 | 80+ | 4000K | U | 140mm |

COLOUR FINISH

 white - WH

 silver - SIL



 black - BLK

 custom powdercoat colour


MOUNTING STYLES

P - Pendant - up/down

W - Wall mounted - up/down



DIMENSIONS

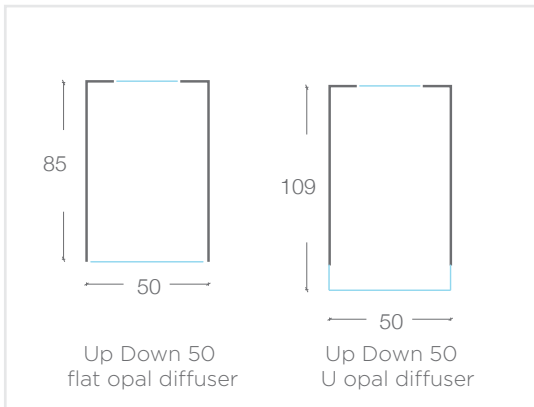

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

