

ADL66 SURFACE

BLUETOOTH CONTROLLABLE SURFACE MOUNTED LED DOWNLIGHT



- Xicato XIM Gen4 technology
- Bluetooth enabled
- Standard CRI 83+ or Artist high CRI 98
- 3000K, 4000K or 2700K upon request
- High quality, mirror finish low glare reflector
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Made in Australia
- Supplied with 48v remote power supply
- L70B0 at 55,000 hours




XIM GEN4 BLE 48V – 83+ CRI

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
ADL66.XB48.N.83.66S	ADL66.XB48.N.83.67S	28°	3000K	740	12
ADL66.XB48.N.84.66S	ADL66.XB48.N.83.67S	28°	4000K	740	12
ADL66.XB48.M.83.66S	ADL66.XB48.M.83.67S	36°	3000K	913	12
ADL66.XB48.M.84.66S	ADL66.XB48.M.84.67S	36°	4000K	913	12
ADL66.XB48.W.83.66S	ADL66.XB48.W.83.67S	55°	3000K	896	12
ADL66.XB48.W.84.66S	ADL66.XB48.W.84.67S	55°	4000K	896	12

XIM GEN4 BLE 48V – 98 CRI

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
ADL66.XB48.M.93.66S	ADL66.XB48.M.93.67S	28°	3000K	460	11.5
ADL66.XB48.M.94.66S	ADL66.XB48.M.94.67S	28°	4000K	460	11.5
ADL66.XB48.M.93.66S	ADL66.XB48.M.93.67S	36°	3000K	570	11.5
ADL66.XB48.M.94.66S	ADL66.XB48.M.94.67S	36°	4000K	570	11.5
ADL66.XB48.W.93.66S	ADL66.XB48.W.93.67S	55°	3000K	560	11.5
ADL66.XB48.W.94.66S	ADL66.XB48.W.94.67S	55°	4000K	560	11.5


COLOUR FINISH

-  white textured powdercoat – WH
-  silver textured powdercoat – SIL
-  black textured powdercoat – BLK




custom powdercoat colour

PHOTOMETRICS

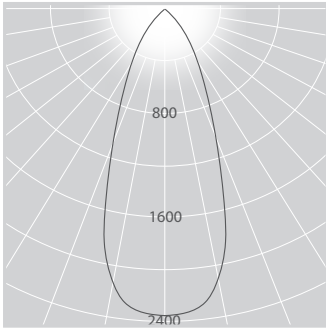

ADL66.XB48.M.83.675

DIMENSIONS

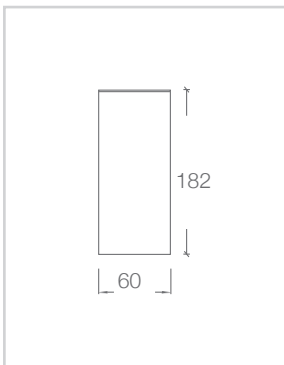

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

