




- 80+ CRI or 90+ CRI versions
- Even illumination - no spots
- Custom made lengths
- Wall mounting bracket available
- Integral driver
- 3000K, 4000K or RGB/colour tunable on request
- **Optional screwless endcaps**
- **Registered design no. 201513962**

## HOW TO ORDER

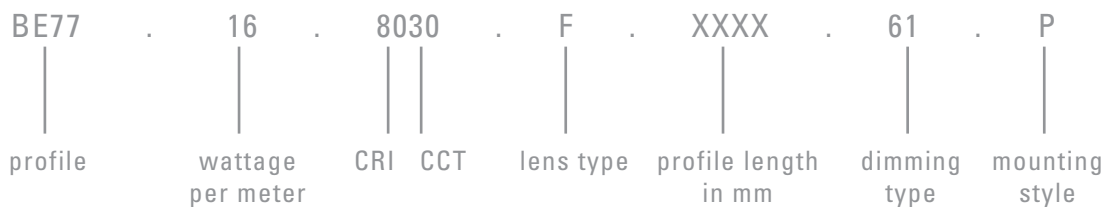

### BELL77 - STANDARD OUTPUT - 80+ CRI

Non Dimmable	DALI Dimmable	System watts per meter	Absolute lumens per meter	CRI	CCT	Lens	Divisible by
BE77.16.8030.F.XXXX.61	BE77.16.8030.F.XXXX.66	16	1170	80+	3000K	FLAT	100mm
BE77.16.8040.F.XXXX.61	BE77.16.8040.F.XXXX.66	16	1170	80+	4000K	FLAT	100mm

### BELL77 - STANDARD OUTPUT - 90+ CRI

Non Dimmable	DALI Dimmable	System watts per meter	Absolute lumens per meter	CRI	CCT	Lens	Divisible by
BE77.34.9030.F.XXXX.61	BE77.34.9030.F.XXXX.66	34	1864	90+	3000K	FLAT	50mm
BE77.34.9040.F.XXXX.61	BE77.34.9040.F.XXXX.66	34	1864	90+	4000K	FLAT	50mm

### BELL77 - HIGH OUTPUT - 80+ CRI

Non Dimmable	DALI Dimmable	System watts per meter	Absolute lumens per meter	CRI	CCT	Lens	Divisible by
BE77.25.8030.F.XXXX.61	BE77.25.8030.F.XXXX.66	25	2428	80+	3000K	FLAT	140mm
BE77.25.8040.F.XXXX.61	BE77.25.8040.F.XXXX.66	25	2428	80+	4000K	FLAT	140mm
BE77.31.8030.F.XXXX.61	BE77.31.8030.F.XXXX.66	31	2990	80+	3000K	FLAT	140mm
BE77.31.8040.F.XXXX.61	BE77.31.8040.F.XXXX.66	31	2990	80+	4000K	FLAT	140mm

## COLOUR FINISH

 white - WH

 silver - SIL

 black - BLK



custom powdercoat colour

## MOUNTING STYLES


S - Surface mounted



P - Pendant - down only



## DIMENSIONS



Bell 77  
flat opal diffuser



**Street Address:**  
39 Tinning Street, Brunswick,  
Victoria, 3056, Australia

**Postal Address:**  
PO BOX 5084  
Moreland West VIC 3055

T +61 3 9222 5522  
[www.elslighting.com.au](http://www.elslighting.com.au)

