



- Up down illumination
- 80+ CRI or 90+ CRI versions
- Even illumination - no spots
- Flat diffuser
- Custom made lengths
- Rod suspended or wire suspended
- Integral driver
- 3000K, 4000K or RGB/colour tunable on request
- **Optional screwless endcaps**
- **Registered design no. 201513963**

HOW TO ORDER

VA78	.	21	.	8030	.	F	.	XXXX	.	61
profile		wattage per meter		CRI CCT		lens type downward		profile length in mm		dimming type

VALLEY78 - STANDARD OUTPUT - 80+ CRI

Non Dimmable	DALI Dimmable	System watts per meter (up + down)	Absolute lm per meter (up)	Absolute lm per meter (down)	CRI	CCT	Lens	Divisible by
VA78.21.8030.F.XXXX.61	VA78.21.8030.F.XXXX.66	21	400	1170	80+	3000K	FLAT	100mm
VA78.21.8040.F.XXXX.61	VA78.21.8040.F.XXXX.66	21	400	1170	80+	4000K	FLAT	100mm

VALLEY78 - STANDARD OUTPUT - 90+ CRI DOWN (80+ CRI UP)

Non Dimmable	DALI Dimmable	System watts per meter (up + down)	Absolute lm per meter (up)	Absolute lm per meter (down)	CRI	CCT	Lens	Divisible by
VA78.39.9030.F.XXXX.61	VA78.39.9030.F.XXXX.66	39	430	1864	90+	3000K	FLAT	50mm
VA78.39.9040.F.XXXX.61	VA78.39.9040.F.XXXX.66	39	430	1864	90+	4000K	FLAT	50mm





VALLEY78 - HIGH OUTPUT - 80+ CRI

Non Dimmable	DALI Dimmable	System watts per meter (up + down)	Absolute lm per meter (up)	Absolute lm per meter (down)	CRI	CCT	Lens	Divisible by
VA78.30.8030.F.XXXX.61	VA78.30.8030.F.XXXX.66	30	430	2428	80+	3000K	FLAT	140mm
VA78.30.8040.F.XXXX.61	VA78.30.8040.F.XXXX.66	30	430	2428	80+	4000K	FLAT	140mm
VA78.36.8030.F.XXXX.61	VA78.36.8030.F.XXXX.66	36	430	2990	80+	3000K	FLAT	140mm
VA78.36.8040.F.XXXX.61	VA78.36.8040.F.XXXX.66	36	430	2990	80+	4000K	FLAT	140mm

VALLEY78 - HIGH OUTPUT - 80+ CRI


Non Dimmable	DALI Dimmable	System watts per meter (up + down)	Absolute lm per meter (up)	Absolute lm per meter (down)	CRI	CCT	Lens	Divisible by
VA78.30.8030.F.XXXX.61	VA78.30.8030.F.XXXX.66	30.5	400	2428	80+	3000K	FLAT	280mm
VA78.30.8030.U.XXXX.61	VA78.30.8030.U.XXXX.66	30.5	400	2428	80+	3000K	U	280mm
VA78.30.8040.F.XXXX.61	VA78.30.8040.F.XXXX.66	30.5	400	2428	80+	4000K	FLAT	280mm
VA78.30.8040.U.XXXX.61	VA78.30.8040.U.XXXX.66	30.5	400	2428	80+	4000K	U	280mm
VA78.35.8030.F.XXXX.61	VA78.35.8030.F.XXXX.66	35.5	780	2428	80+	3000K	FLAT	280mm
VA78.35.8030.U.XXXX.61	VA78.35.8030.U.XXXX.66	35.5	780	2428	80+	3000K	U	280mm
VA78.35.8040.F.XXXX.61	VA78.35.8040.F.XXXX.66	35.5	780	2428	80+	4000K	FLAT	280mm
VA78.35.8040.U.XXXX.61	VA78.35.8040.U.XXXX.66	35.5	780	2428	80+	4000K	U	280mm
VA78.37.8030.F.XXXX.61	VA78.37.8030.F.XXXX.66	37	400	2990	80+	3000K	FLAT	280mm
VA78.37.8030.U.XXXX.61	VA78.37.8030.U.XXXX.66	37	400	2990	80+	3000K	U	280mm
VA78.37.8040.F.XXXX.61	VA78.37.8040.F.XXXX.66	37	400	2990	80+	4000K	FLAT	280mm
VA78.37.8040.U.XXXX.61	VA78.37.8040.U.XXXX.66	37	400	2990	80+	4000K	U	280mm
VA78.42.8030.F.XXXX.61	VA78.42.8030.F.XXXX.66	42	780	2990	80+	3000K	FLAT	280mm
VA78.42.8030.U.XXXX.61	VA78.42.8030.U.XXXX.66	42	780	2990	80+	3000K	U	280mm
VA78.42.8030.F.XXXX.61	VA78.42.8030.F.XXXX.66	42	780	2990	80+	4000K	FLAT	280mm
VA78.42.8030.U.XXXX.61	VA78.42.8030.U.XXXX.66	42	780	2990	80+	4000K	U	280mm

COLOUR FINISH


-  white - WH
-  silver - SIL
-  black - BLK
-  custom powdercoat colour

MOUNTING STYLES

Pendant - up /down



DIMENSIONS

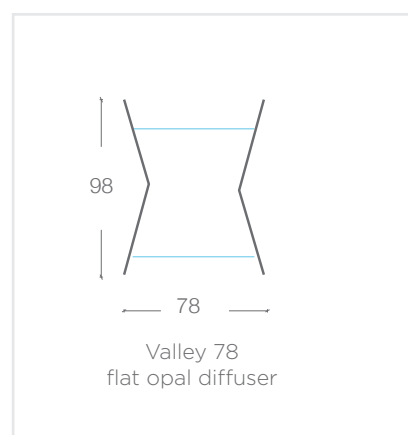

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

