

# ADL110 DOWNLIGHT

## LED RECESSED DOWNLIGHT



- Xicato XTM technology
- Standard CRI 83+ or Artist high CRI 98
- 3000K, 4000K or 2700K upon request
- High quality, mirror finish low glare reflector
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Thin 2.5mm white polycarbonate trim
- Made in Australia
- L70B0 at 55,000 hours
- Available in a Bluetooth dimmable version refer to Smart Lighting Catalogue

### XTM 240V – 83+ CRI – LOW OUTPUT

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL110.XTM5M.8030.61	ADL110.XTM5M.8030.63	ADL110.XTM5M.8030.66	31°	3000K	1385	13.5
ADL110.XTM5M.8040.61	ADL110.XTM5M.8040.63	ADL110.XTM5M.8040.66	31°	4000K	1385	13.5
ADL110.XTM5W.8030.61	ADL110.XTM5W.8030.63	ADL110.XTM5W.8030.66	55°	3000K	1267	13.5
ADL110.XTM5W.8040.61	ADL110.XTM5W.8040.63	ADL110.XTM5W.8040.66	55°	4000K	1267	13.5

### XTM 240V – 83+ CRI – HIGH OUTPUT

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL110.XTM7M.8030.61	ADL110.XTM7M.8030.63	ADL110.XTM7M.8030.66	31°	3000K	1861	18.5
ADL110.XTM7M.8040.61	ADL110.XTM7M.8040.63	ADL110.XTM7M.8040.66	31°	4000K	1861	18.5
ADL110.XTM7W.8030.61	ADL110.XTM7W.8030.63	ADL110.XTM7W.8030.66	55°	3000K	1708	18.5
ADL110.XTM7W.8040.61	ADL110.XTM7W.8040.63	ADL110.XTM7W.8040.66	55°	4000K	1708	18.5

### XTM 240V – 98 CRI – LOW OUTPUT

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL110.XTM5M.9530.61	ADL110.XTM5M.9530.63	ADL110.XTM5M.9530.66	31°	3000K	980	11.5
ADL110.XTM5M.9540.61	ADL110.XTM5M.9540.63	ADL110.XTM5M.9540.66	31°	4000K	980	11.5
ADL110.XTM5W.9530.61	ADL110.XTM5W.9530.63	ADL110.XTM5W.9530.66	55°	3000K	1105	11.5
ADL110.XTM5W.9540.61	ADL110.XTM5W.9540.63	ADL110.XTM5W.9540.66	55°	4000K	1105	11.5


### XTM 240V – 98 CRI – HIGH OUTPUT

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL110.XTM7M.9530.61	ADL110.XTM7M.9530.63	ADL110.XTM7M.9530.66	31°	3000K	1300	16.5
ADL110.XTM7M.9540.61	ADL110.XTM7M.9540.63	ADL110.XTM7M.9540.66	31°	4000K	1300	16.5
ADL110.XTM7W.9530.61	ADL110.XTM7W.9530.63	ADL110.XTM7W.9530.66	55°	3000K	1312	16.5
ADL110.XTM7W.9540.61	ADL110.XTM7W.9540.63	ADL110.XTM7W.9540.66	55°	4000K	1312	16.5


## COLOUR FINISH



## PHOTOMETRICS




ADL110.XTM7M.8030.61



ADL110.XTM5W.8030.61

## DIMENSIONS – XTM

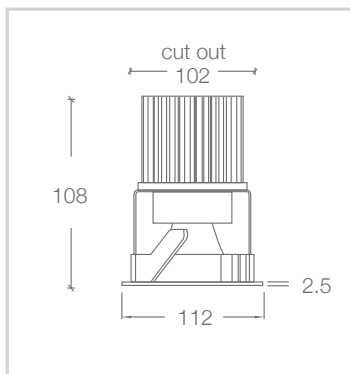

**Street Address:**  
39 Tinning Street, Brunswick,  
Victoria, 3056, Australia

**Postal Address:**  
PO BOX 5084  
Moreland West VIC 3055

T +61 3 9222 5522  
[www.elslighting.com.au](http://www.elslighting.com.au)

