

ADL66 SURFACE DOWNLIGHT

LED SURFACE MOUNTED DOWNLIGHT



- XICATO XTM technology
- Standard CRI 83+ or Artist high CRI 98
- 3000K, 4000K or 2700K upon request
- High quality, mirror finish low glare reflector
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Made in Australia
- L70B0 at 55,000 hours
- Available in a Bluetooth dimmable version refer to Smart Lighting Catalogue

XTM 240V – 83+ CRI

Non Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL66.XTM7N.8030.61S	ADL66.XTM7N.8030.66S	24°	3000K	607	6
ADL66.XTM7N.8040.61S	ADL66.XTM7N.8040.66S	24°	4000K	607	6
ADL66.XTM3M.8030.61S	ADL66.XTM3M.8030.66S	35°	3000K	626	6
ADL66.XTM3M.8040.61S	ADL66.XTM3M.8040.66S	35°	4000K	626	6
ADL66.XTM3W.8030.61S	ADL66.XTM3W.8030.66S	55°	3000K	607	6
ADL66.XTM3W.8040.61S	ADL66.XTM3W.8040.66S	55°	4000K	607	6

XTM 240V – 98 CRI

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL66.XTM7N.9530.61S	ADL66.XTM7N.9530.63S	ADL66.XTM7N.9530.66S	24°	3000K	621	8
ADL66.XTM7N.9540.61S	ADL66.XTM7N.9540.63S	ADL66.XTM7N.9540.66S	24°	4000K	621	8
ADL66.XTM3M.9530.61S	ADL66.XTM3M.9530.63S	ADL66.XTM3M.9530.66S	35°	3000K	645	8
ADL66.XTM3M.9540.61S	ADL66.XTM3M.9540.63S	ADL66.XTM3M.9540.66S	35°	4000K	645	8
ADL66.XTM3W.9530.61S	ADL66.XTM3W.9530.63S	ADL66.XTM3W.9530.66S	55°	3000K	621	8
ADL66.XTM3W.9540.61S	ADL66.XTM3W.9540.63S	ADL66.XTM3W.9540.66S	55°	4000K	621	8

COLOUR FINISH



white - WH



silver - SIL




black - BLK




custom powdercoat colour

PHOTOMETRICS



ADL66.XTM3W.8030.61S


DIMENSIONS – XTM

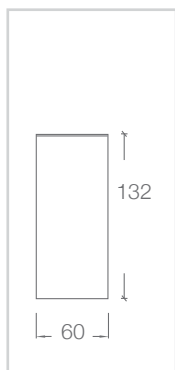

NON DIM



TRAILING EDGE

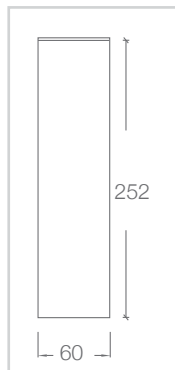

DALI DIM

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

