




- 80+ CRI or 90+ CRI versions
- Even illumination - no spots
- Custom made lengths
- Wall mounting bracket available
- Integral driver
- 3000K, 4000K or RGB/colour tunable on request
- **Optional screwless endcaps**
- **Registered design no. 201513962**

## HOW TO ORDER

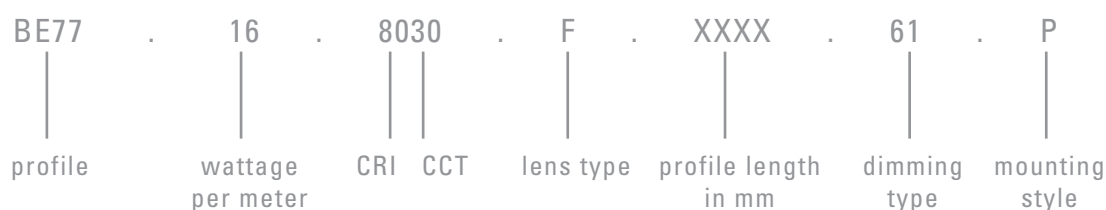

### BELL77 - STANDARD OUTPUT - 80+ CRI

| Non Dimmable           | DALI Dimmable          | System watts per meter | Absolute lumens per meter | CRI | CCT   | Lens | Divisible by |
|------------------------|------------------------|------------------------|---------------------------|-----|-------|------|--------------|
| BE77.16.8030.F.XXXX.61 | BE77.16.8030.F.XXXX.66 | 19                     | 1405                      | 80+ | 3000K | FLAT | 100mm        |
| BE77.16.8040.F.XXXX.61 | BE77.16.8040.F.XXXX.66 | 19                     | 1405                      | 80+ | 4000K | FLAT | 100mm        |

### BELL77 - STANDARD OUTPUT - 90+ CRI

| Non Dimmable           | DALI Dimmable          | System watts per meter | Absolute lumens per meter | CRI | CCT   | Lens | Divisible by |
|------------------------|------------------------|------------------------|---------------------------|-----|-------|------|--------------|
| BE77.34.9030.F.XXXX.61 | BE77.34.9030.F.XXXX.66 | 34                     | 1864                      | 90+ | 3000K | FLAT | 50mm         |
| BE77.34.9040.F.XXXX.61 | BE77.34.9040.F.XXXX.66 | 34                     | 1864                      | 90+ | 4000K | FLAT | 50mm         |

### BELL77 - HIGH OUTPUT - 80+ CRI

| Non Dimmable           | DALI Dimmable          | System watts per meter | Absolute lumens per meter | CRI | CCT   | Lens | Divisible by |
|------------------------|------------------------|------------------------|---------------------------|-----|-------|------|--------------|
| BE77.25.8030.F.XXXX.61 | BE77.25.8030.F.XXXX.66 | 25                     | 2428                      | 80+ | 3000K | FLAT | 140mm        |
| BE77.25.8040.F.XXXX.61 | BE77.25.8040.F.XXXX.66 | 25                     | 2428                      | 80+ | 4000K | FLAT | 140mm        |
| BE77.31.8030.F.XXXX.61 | BE77.31.8030.F.XXXX.66 | 31                     | 2990                      | 80+ | 3000K | FLAT | 140mm        |
| BE77.31.8040.F.XXXX.61 | BE77.31.8040.F.XXXX.66 | 31                     | 2990                      | 80+ | 4000K | FLAT | 140mm        |

## COLOUR FINISH

 white - WH

 silver - SIL

 black - BLK



custom powdercoat colour

## MOUNTING STYLES


S - Surface mounted



P - Pendant - down only



## DIMENSIONS



Bell 77  
flat opal diffuser



**Street Address:**  
39 Tinning Street, Brunswick,  
Victoria, 3056, Australia

**Postal Address:**  
PO BOX 5084  
Moreland West VIC 3055

T +61 3 9222 5522  
[www.elslighting.com.au](http://www.elslighting.com.au)

