

DISPLAY SPOT 160

BLUETOOTH ENABLED ADJUSTABLE LED DOWNLIGHT



- XICATO XTM or XIM Gen 4 LED technology
- Bluetooth enabled
- Rotatable and adjustable
- Die cast aluminium trim, powdercoated white
- Aluminium reflector and internal lens
- 3000K, 4000K or 2700K upon request
- Ceiling mounted without tools
- Standard CRI 83+ or Artist CRI 98
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Supplied with 48v remote power supply
- L70B0FO @ 55,000 hours

XIM GEN4 BLE 48V – 83+ CRI - LOW OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
DS160.XBL48.N.8030.66	DS160.XBL48.N.8030.67	18°	3000K	1775	25
DS160.XBL48.N.8040.66	DS160.XBL48.N.8040.67	18°	4000K	1775	25
DS160.XBL48.M.8030.66	DS160.XBL48.M.8030.67	28°	3000K	1785	25
DS160.XBL48.M.8040.66	DS160.XBL48.M.8040.67	28°	4000K	1785	25
DS160.XBL48.W.8030.66	DS160.XBL48.W.8030.67	37°	3000K	1785	25
DS160.XBL48.W.8040.66	DS160.XBL48.W.8040.67	37°	4000K	1785	25

XIM GEN4 BLE 48V – 83+ CRI - HIGH OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
DS160.XB48.N.8030.66	DS160.XB48.N.8030.67	18°	3000K	2535	36
DS160.XB48.N.8040.66	DS160.XB48.N.8040.67	18°	4000K	2535	36
DS160.XB48.M.8030.66	DS160.XB48.M.8030.67	28°	3000K	2550	36
DS160.XB48.M.8040.66	DS160.XB48.M.8040.67	28°	4000K	2550	36
DS160.XB48.W.8030.66	DS160.XB48.W.8030.67	37°	3000K	2550	36
DS160.XB48.W.8040.66	DS160.XB48.W.8040.67	37°	4000K	2550	36


XIM GEN4 BLE 48V – 98 CRI - LOW OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
DS160.XBL48.N.9530.66	DS160.XBL48.N.9530.67	18°	3000K	1775	30
DS160.XBL48.N.9540.66	DS160.XBL48.N.9540.67	18°	4000K	1775	30
DS160.XBL48.M.9530.66	DS160.XBL48.M.9530.67	28°	3000K	1785	30
DS160.XBL48.M.9540.66	DS160.XBL48.M.9540.67	28°	4000K	1785	30
DS160.XBL48.W.9530.66	DS160.XBL48.W.9530.67	37°	3000K	1785	30
DS160.XBL48.W.9540.66	DS160.XBL48.W.9540.67	37°	4000K	1785	30

XIM GEN4 BLE 48V – 98 CRI - HIGH OUTPUT

DALI Dimmable	Bluetooth Dimmable	Beam	CCT	Lumens	Watts
DS160.XB48.N.9530.66	DS160.XB48.N.9530.67	18°	3000K	2535	42
DS160.XB48.N.9540.66	DS160.XB48.N.9540.67	18°	4000K	2535	42
DS160.XB48.M.9530.66	DS160.XB48.M.9530.67	28°	3000K	2550	42
DS160.XB48.M.9540.66	DS160.XB48.M.9540.67	28°	4000K	2550	42
DS160.XB48.W.9530.66	DS160.XB48.W.9530.67	37°	3000K	2550	42
DS160.XB48.W.9540.66	DS160.XB48.W.9540.67	37°	4000K	2550	42

DIMENSIONS

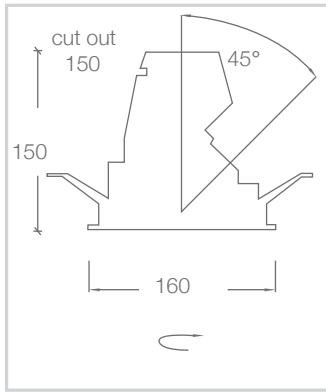

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

