

# ADL110 PENDANT

## LED PENDANT



- Xicato XTM technology
- Standard CRI 83+ or Artist high CRI 98
- 3000K or 4000K
- Aluminium body, powdercoated
- High quality, mirror finish low glare reflector
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Made in Australia
- 1mtr standard drop
- L70B0 at 55,000 hours
- Available in a Bluetooth dimmable version refer to Smart Lighting Catalogue

### XTM 240V – 83+ CRI – LOW OUTPUT

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL110.XIM5M.8030.61P	ADL110.XIM5M.8030.63P	ADL110.XIM5M.8030.66P	31°	3000K	1385	13.5
ADL110.XIM5M.8040.61P	ADL110.XIM5M.8040.63P	ADL110.XIM5M.8040.66P	31°	4000K	1385	13.5
ADL110.XIM5W.8030.61P	ADL110.XIM5W.8030.63P	ADL110.XIM5W.8030.66P	55°	3000K	1267	13.5
ADL110.XIM5W.8040.61P	ADL110.XIM5W.8040.63P	ADL110.XIM5W.8040.66P	55°	4000K	1267	13.5

### XTM 240V – 83+ CRI – HIGH OUTPUT

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL110.XTM7M.8030.61P	ADL110.XTM7M.8030.63P	ADL110.XTM7M.8030.66P	31°	3000K	1861	18.5
ADL110.XTM7M.8040.61P	ADL110.XTM7M.8040.63P	ADL110.XTM7M.8040.66P	31°	4000K	1861	18.5
ADL110.XTM7W.8030.61P	ADL110.XTM7W.8030.63P	ADL110.XTM7W.8030.66P	55°	3000K	1708	18.5
ADL110.XTM7W.8040.61P	ADL110.XTM7W.8040.63P	ADL110.XTM7W.8040.66P	55°	4000K	1708	18.5

### XTM 240V – 98 CRI – LOW OUTPUT

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL110.XTM5M.9530.61P	ADL110.XTM5M.9530.63P	ADL110.XTM5M.9530.66P	31°	3000K	980	11.5
ADL110.XTM5M.9540.61P	ADL110.XTM5M.9540.63P	ADL110.XTM5M.9540.66P	31°	4000K	980	11.5
ADL110.XTM5W.9530.61P	ADL110.XTM5W.9530.63P	ADL110.XTM5W.9530.66P	55°	3000K	1105	11.5
ADL110.XTM5W.9540.61P	ADL110.XTM5W.9540.63P	ADL110.XTM5W.9540.66P	55°	4000K	1105	11.5

### XTM 240V – 98 CRI – HIGH OUTPUT

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL110.XTM7M.9530.61P	ADL110.XTM7M.9530.63P	ADL110.XTM7M.9530.66P	31°	3000K	1300	16.5
ADL110.XTM7M.9540.61P	ADL110.XTM7M.9540.63P	ADL110.XTM7M.9540.66P	31°	4000K	1300	16.5
ADL110.XTM7W.9530.61P	ADL110.XTM7W.9530.63P	ADL110.XTM7W.9530.66P	55°	3000K	1312	16.5
ADL110.XTM7W.9540.61P	ADL110.XTM7W.9540.63P	ADL110.XTM7W.9540.66P	55°	4000K	1312	16.5

### COLOURED FLEX



pink



white



black



green



blue



red



orange



yellow

## COLOUR FINISH



white - WH



silver - SIL




black - BLK




custom powdercoat colour

## PHOTOMETRICS




ADL110.XTM7W.8030.61P




ADL110.XTM5W.8030.61P

## DIMENSIONS

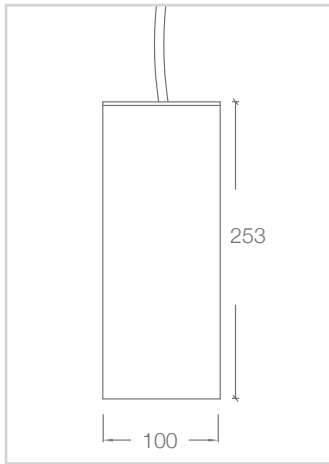

NON DIMMABLE

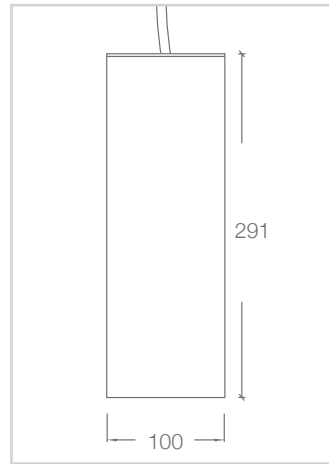

DIMMABLE

**Street Address:**  
39 Tinning Street, Brunswick,  
Victoria, 3056, Australia

**Postal Address:**  
PO BOX 5084  
Moreland West VIC 3055

T +61 3 9222 5522  
[www.elslighting.com.au](http://www.elslighting.com.au)

