

ADL66 PENDANT

LED PENDANT



- Xicato XTM technology
- Standard CRI 83+ or Artist high CRI 98
- 3000K, 4000K or 2700K upon request
- Aluminium body, powdercoated
- High quality, mirror finish low glare reflector
- Excellent colour consistency from luminaire to luminaire
- 5 year colour consistency warranty - no colour shift
- Made in Australia
- 1mtr standard drop
- L70B0 at 55,000 hours
- Available in a Bluetooth dimmable version refer to Smart Lighting Catalogue

XTM 240V – 83+ CRI

Non Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL66.XTM7N.8030.61P	ADL66.XTM7N.8030.66P	24°	3000K	607	6
ADL66.XTM7N.8040.61P	ADL66.XTM7N.8040.66P	24°	4000K	607	6
ADL66.XTM3M.8030.61P	ADL66.XTM3M.8030.66P	35°	3000K	626	6
ADL66.XTM3M.8040.61P	ADL66.XTM3M.8040.66P	35°	4000K	626	6
ADL66.XTM3W.8030.61P	ADL66.XTM3W.8030.66P	55°	3000K	607	6
ADL66.XTM3W.8040.61P	ADL66.XTM3W.8040.66P	55°	4000K	607	6

XTM 240V – 98 CRI


Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
ADL66.XTM7N.9530.61P	ADL66.XTM7N.9530.63P	ADL66.XTM7N.9530.66P	24°	3000K	621	8
ADL66.XTM7N.9540.61P	ADL66.XTM7N.9540.63P	ADL66.XTM7N.9540.66P	24°	4000K	621	8
ADL66.XTM3M.9530.61P	ADL66.XTM3M.9530.63P	ADL66.XTM3M.9530.66P	35°	3000K	695	8
ADL66.XTM3M.9540.61P	ADL66.XTM3M.9540.63P	ADL66.XTM3M.9540.66P	35°	4000K	695	8
ADL66.XTM3W.9530.61P	ADL66.XTM3W.9530.63P	ADL66.XTM3W.9530.66P	55°	3000K	621	8
ADL66.XTM3W.9540.61P	ADL66.XTM3W.9540.63P	ADL66.XTM3W.9540.66P	55°	4000K	621	8

COLOURED FLEX




pink white black green blue red orange yellow


COLOUR FINISH



PHOTOMETRICS




ADL66.XTM3W.8030.61P




ADL66.XTM7N.8030.61P


DIMENSIONS – XTM

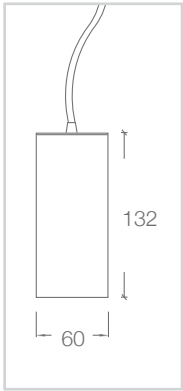

NON DIM

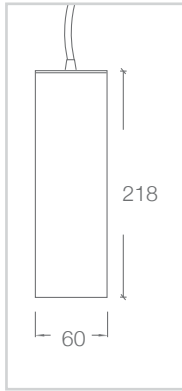

TRAILING EDGE

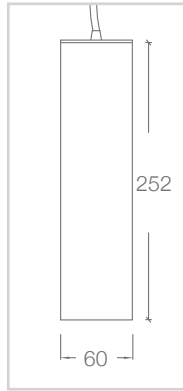

DALI DIM

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

