



- IP65 rated
- Aluminium housing powdercoated
- Available in 3000K, 4000K or 5700K
- Made in EU

HOW TO ORDER

4125 . 58 . 08 . 85 . DRD

fitting body colour wattage CCT accessories

PROTEK

Non Dimmable	CCT.	Lumens	Watts
4125.58.08.83	3000K	748	8
4125.58.08.84	4000K	814	8
4125.58.08.85	5700K	814	8
4125.58.16.83	3000K	1497	16
4125.58.16.84	4000K	1629	16
4125.58.16.85	5700K	1629	16
4125.58.25.83	3000k	2246	25
4125.58.25.84	4000K	2441	25
4125.58.25.85	5700K	2441	25
4125.58.50.83	3000K	4492	50
4125.58.50.84	4000K	4888	50
4125.58.50.85	5700K	4888	50

OPTIONAL ACCESSORIES

DALI dimmable driver	DRD
Opal diffuser	4143
Recessed mounting frame	MP


BODY COLOUR

Dark grey	58
Black	02
White	01

CCT

3000K	83
4000K	84
5000K	85

DIMENSIONS

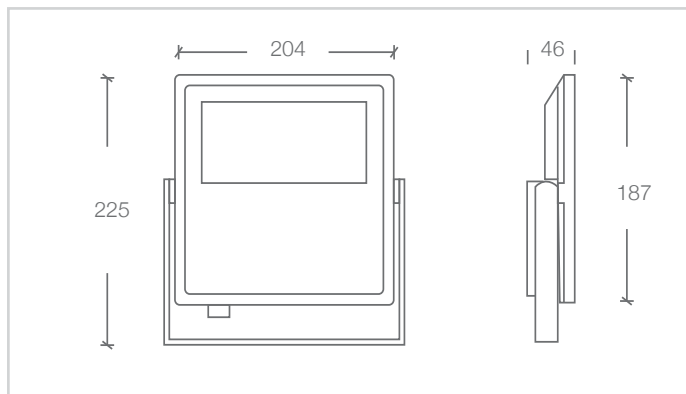

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

