

# WALL WASH 160 GEN2

WALL WASH DOWNLIGHT



- 95+ CRI
- 3000K or 4000K
- wall wash reflector
- frosted glass internal lens
- L90B10 up to 90,000 hours
- 2 X SDCM

## WALL WASH 160 Gen2 – 500mA


Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	CCT	Lumens	Watts
LXW160.500.93.61	LXW160.500.93.63	LXW160.700.93.66	3000K	1490	19
LXW160.500.94.61	LXW160.500.94.63	LXW160.700.94.66	4000K	1519	19

## WALL WASH 160 Gen2 – 700mA

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	CCT	Lumens	Watts
LXW160.700.93.61	LXW160.700.93.63	LXW160.700.93.66	3000K	1892	27
LXW160.700.94.61	LXW160.700.94.63	LXW160.700.94.66	4000K	1927	27


lumen outputs estimated at time of printing

## SPACING CALCULATION

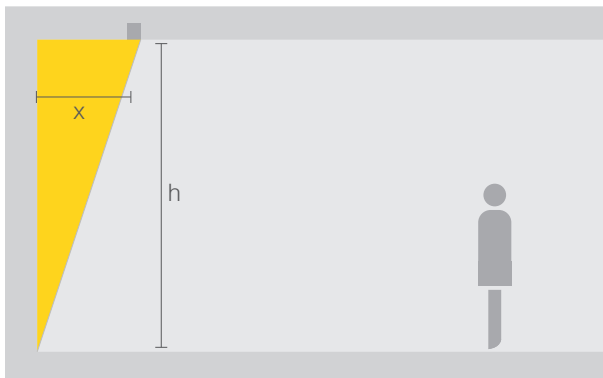


$$x = h \quad y = x$$

eg. 6m high ceiling – x=3m, y=3m

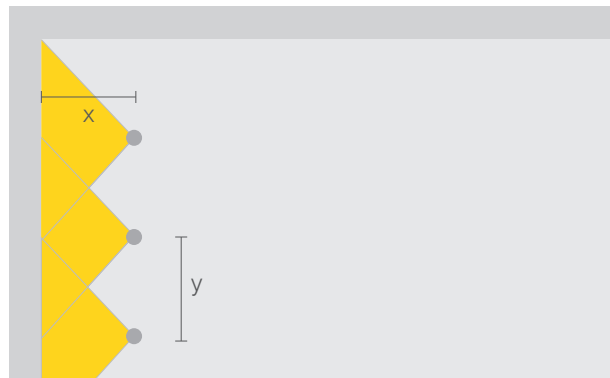

## WALL WASH 160 GEN2

---

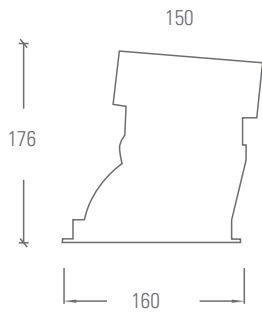

### Trim Finish

---

White

---

### Custom Luminaire Modifications

---

2700K and 3500K Colour Temperature

---

80+ CRI

---

Custom outputs

---

Casambi dimming

---

### Street Address:

39 Tinning Street, Brunswick,  
Victoria, 3056, Australia

### Postal Address:

PO BOX 5084  
Moreland West VIC 3055

T +61 3 9222 5522

[www.elslighting.com.au](http://www.elslighting.com.au)

