




- IP67
- Low copper content die-cast aluminium housing with high corrosion resistance
- 6mm front ring in grade 316 stainless steel
- Stainless steel fasteners in grade 316
- High efficiency optics and PMMA lens
- Durable silicone rubber gasket
- Clear toughened 10mm thick glass, walk over 200kg. Maximum
- Body is treated with a chemical chromatised protection before powder coating
- Recessing box in high density polyethylene
- Optional DALI dimmable
- 48v - power supply not included - order separately

ORDERING GUIDE

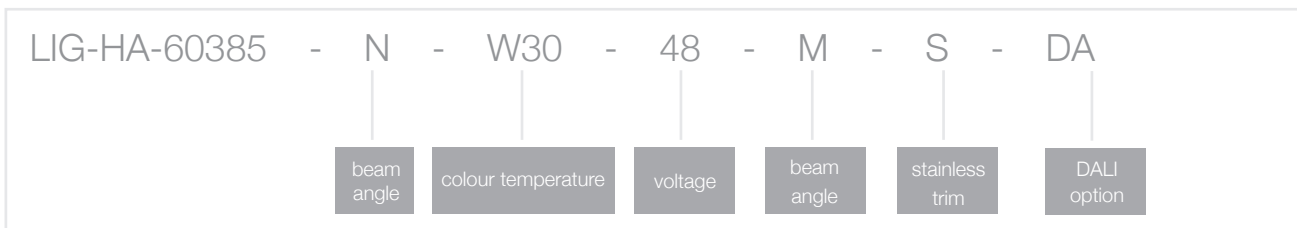


HARRIER

Model name	Model number	Lumens	Watts	Beam			Colour Temperature			Weight
				N	M	W	W27	W30	W40	
HARRIER 1	LIG-HA-60385-	389	8	20°	30°	50°	2700K / 3000K / 4000K			0.7kg
HARRIER 2	LIG-HA-60395-	389	8	20°	30°	50°	2700K / 3000K / 4000K			0.7kg



HARRIER 1

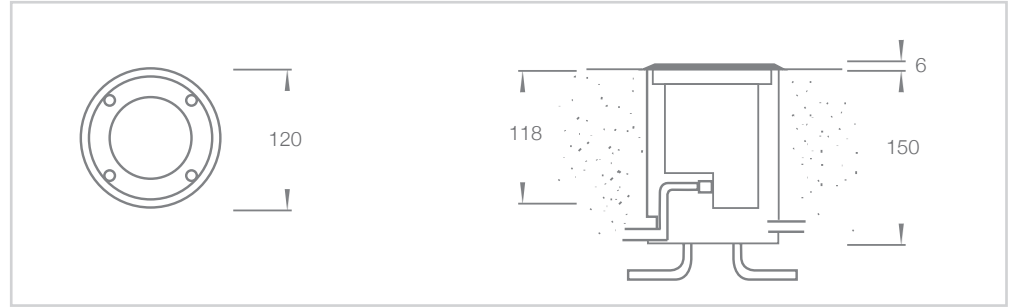


POWER SUPPLY & VOLTAGE DROP GUIDE

Power supply	maximum number of luminaires	maximum cable length			
		1.0mm	1.5mm	2.5mm	4.0mm
75W	8	25M	37M	62M	100M
150W	16	12M	18M	30M	48M
240W	26	7M	11M	18M	28M
320W	35	5M	8M	13M	20M

To ensure efficient drainage, gravel must be used to a depth of 450mm, and width of 300mm beneath the housing, and should also be placed around the luminaire.

HARRIER 2

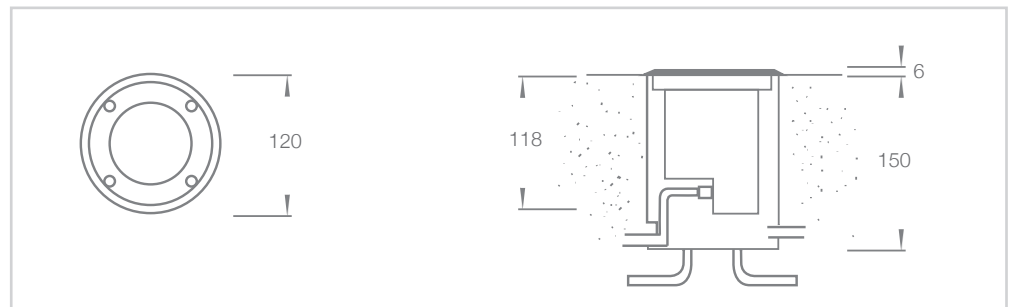

POWER SUPPLY & VOLTAGE DROP GUIDE

Power supply	maximum number of luminaires	maximum cable length			
		1.0mm	1.5mm	2.5mm	4.0mm
75W	8	25M	37M	62M	100M
150W	16	12M	18M	30M	48M
240W	26	7M	11M	18M	28M
320W	35	5M	8M	13M	20M

To ensure efficient drainage, gravel must be used to a depth of 450mm, and width of 300mm beneath the housing, and should also be placed around the luminaire.

This table is a guide only. Power supply not included and must be ordered separately based on individual job requirements.

ACCESSORIES



GVK_KGEL
IP68 GEL CONNECTOR

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

