

LUXIENT66 PENDANT

PREMIUM LED PENDANT



- 95+ CRI
- up to 101 Lm/w
- 3000K or 4000K
- High quality, low glare reflectors
- Black baffle for superior glare control
- Made in Australia
- L90B10 up to 90,000 hours
- 2 X SDCM




LUXIENT 66 PENDANT – 200mA

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts	Lm/W
LX66.200.24.93.61.P	LX66.200.24.93.63.P	LX66.200.24.93.66.P	24°	3000K	643	6.5	99
LX66.200.24.94.61.P	LX66.200.24.94.63.P	LX66.200.24.94.66.P	24°	4000K	658	6.5	101
LX66.200.35.93.61.P	LX66.200.35.93.63.P	LX66.200.35.93.66.P	35°	3000K	643	6.5	99
LX66.200.35.94.61.P	LX66.200.35.94.63.P	LX66.200.35.94.66.P	35°	4000K	658	6.5	101
LX66.200.50.93.61.P	LX66.200.50.93.63.P	LX66.200.50.93.66.P	50°	3000K	643	6.5	99
LX66.200.50.94.61.P	LX66.200.50.94.63.P	LX66.200.50.94.66.P	50°	4000K	658	6.5	101

LUXIENT 66 PENDANT – 250mA

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts	Lm/W
LX66.250.24.93.61.P	LX66.250.24.93.63.P	LX66.250.24.93.66.P	24°	3000K	985	10	98
LX66.250.24.94.61.P	LX66.250.24.94.63.P	LX66.250.24.94.66.P	24°	4000K	1014	10	101
LX66.250.35.93.61.P	LX66.250.35.93.63.P	LX66.250.35.93.66.P	35°	3000K	985	10	98
LX66.250.35.94.61.P	LX66.250.35.94.63.P	LX66.250.35.94.66.P	35°	4000K	1014	10	101
LX66.250.50.93.61.P	LX66.250.50.93.63.P	LX66.250.50.93.66.P	50°	3000K	985	10	98
LX66.250.50.94.61.P	LX66.250.50.94.63.P	LX66.250.50.94.66.P	50°	4000K	1014	10	101


LUXIENT 66 PENDANT

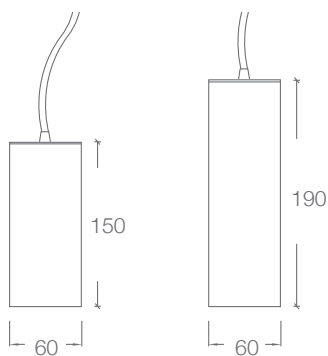

NON DIM

DIMMING

Body Finishes

Black	
White	
Custom	

Custom Luminaire Modifications

2700K and 3500K colour temperature

80+ CRI

Custom outputs

Casambi dimming

Ceiling Rose Options

Surface Flush Mount (requires recessing into ceiling to achieve flush mount)



*Surface mounted ceiling rose supplied unless otherwise specified

Optional Reflector Finishes

Satin black Champagne Satin gold



Matt white Metalised Brass

*Metalised reflectors supplied unless otherwise specified

Optional Cloth Flex

Black Gold White



3 core or 5 core

Yellow Orange Red Emerald Light Blue



3 core only

*1mtr clear flex supplied as standard unless otherwise specified



Street Address:

39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:

PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522

www.elslighting.com.au

