

ESDIUM INDUSTRIAL

IP66 LED FLOODLIGHT



- IP66 rated
- Aluminium housing powdercoated
- Available in 3000K, 4000K or 5000K
- 80+ CRI
- 6 different optics available
- Made in EU

HOW TO ORDER

4400 . 58 . 15 . 0 . 85 . DRD
fitting . body colour . wattage . optic . CCT . accessories

M1 – 150W

Non Dimmable	CCT.	Lumens	Watts
4400.58.15.0.83	3000K	15300	150
4400.58.15.0.84	4000K	16290	150
4400.58.15.0.85	5000K	16560	150

M2 – 300W

Non Dimmable	CCT.	Lumens	Watts
4400.58.30.0.83	3000K	30600	300
4400.58.30.0.84	4000K	32580	300
4400.58.30.0.85	5000K	33120	300

M3 – 450W

Non Dimmable	CCT.	Lumens	Watts
4400.58.45.0.83	3000K	45900	450
4400.58.45.0.84	4000K	48870	450
4400.58.45.0.85	5000K	49680	450

M4 – 600W

Non Dimmable	CCT.	Lumens	Watts
4400.58.60.0.83	3000K	61200	600
4400.58.60.0.84	4000K	65160	600
4400.58.60.0.85	5000K	66240	600

CCT

3000K	83
4000K	84
5000K	85

BODY COLOUR


Dark grey	58
Black	02
White	01

OPTIONAL ACCESSORIES


DALI dimmable driver	DRD
----------------------	-----

OPTICS

Symmetric 100°	0
Extensive symmetric 41°	1
Medium symmetric 32°	2
Intensive symmetric 21°	3
Frontal asymmetric 50°	4
Asymmetric 2 sides 120° x 40°	5

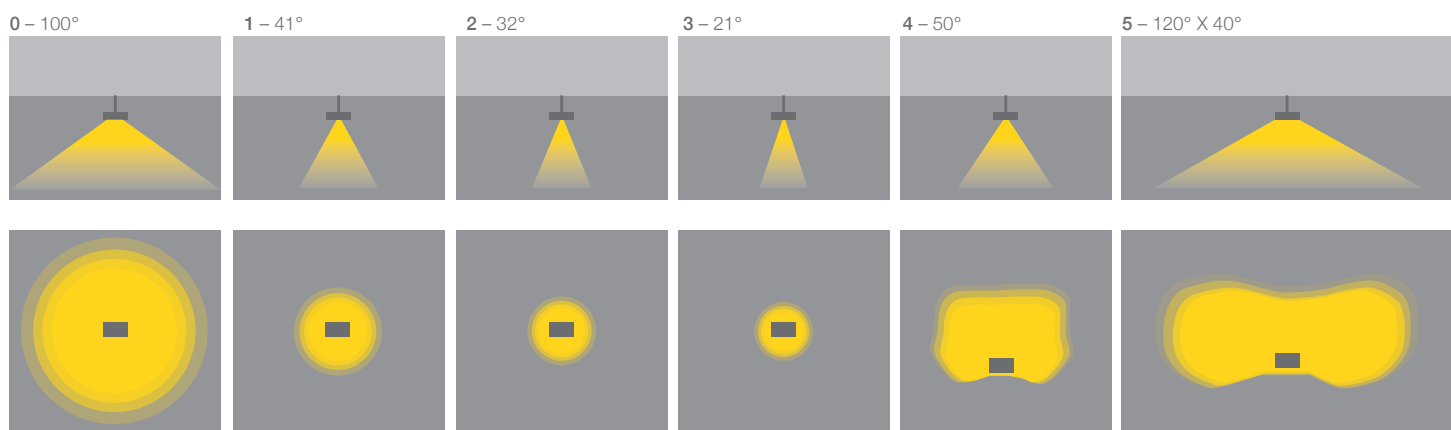

DIMENSIONS

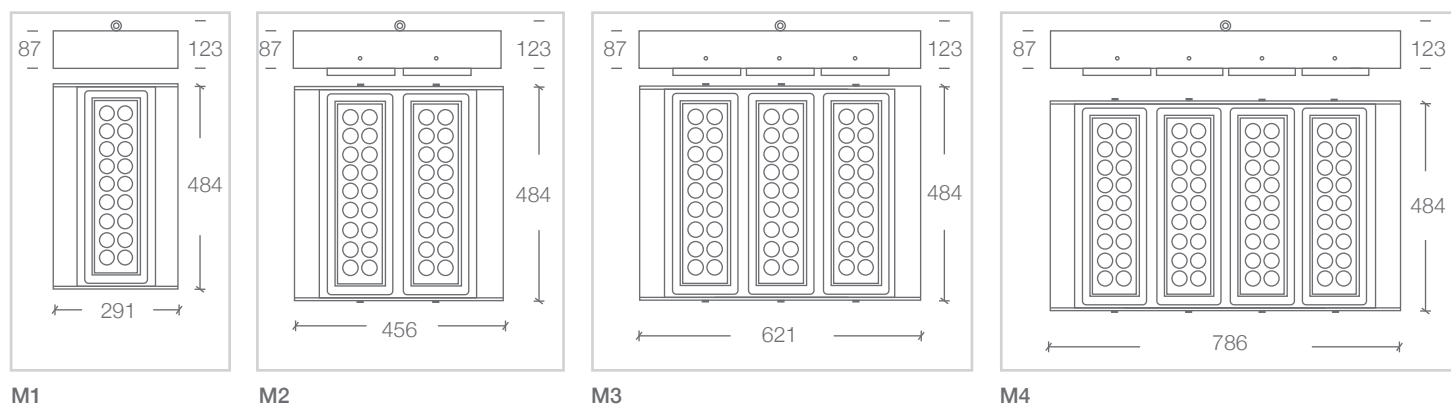

Street Address:

39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:

PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522

www.elslighting.com.au

