

SYSTEM 50 UD



Direct Illumination

Delivered Lumens per meter	1170	1864	2560	3150
System Watts per meter	16	34	24	31
CRI	80+	90+	HO 80+	HO 80+
LED's divisible by	100mm	50mm	140mm	140mm

Indirect Illumination

Delivered Lumens per meter	435	445
System Watts per meter	5	7
CRI	80+	90+
LED's divisible by	100mm	50mm

General Specifications

Materials - Extruded aluminium body | polycarbonate diffuser

Optics - opal flat diffuser | opal U diffuser

Warranty - 5 years

Mounting - Suspended

Accessories - End caps | joiners | suspension | mitered corners | coverplate | linear downlights

Luminaire Length - Custom lengths made to order divisible as per above

LED Specifications

Colour Temperature - 3000K | 4000K

Colour Deviation - 3 x SDCM

Lifetime - 80+ - L80B10 50,000hours

- HO80+ - L80B10 72,000hours

- 90+ - L80B10 60,000hours

Driver Specifications (integral)

Dimming - Non dimmable | DALI dimmable | Casambi

Custom Luminaire Modifications - 2700K | white tunable | RGBW | screwless endcaps (pictured above)


integrated linear downlights | integrated track spots | integrated pendant luminaires

Finishes

Black




White




Custom Powdercoat




UD50
flat diffuser



UD50
U diffuser



CUSTOM LUMINAIRE MODIFICATIONS

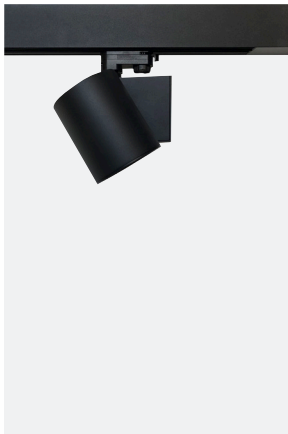

integrated track lights



integrated pendant



integrated linear downlights



HOW TO ORDER

SK50UD	.	34	.	5	.	93	.	F	.	XXXX	.	61	.	W
profile		wattage per meter down		wattage per meter up		CRI CCT		lens type		profile length in mm		dimming type		colour finish

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

