

CARD0155 DOWNLIGHT

PREMIUM LED RECESSED DOWNLIGHT



- 85+ CRI
- Over 100 Lm/w
- 3000K, 4000K or 2700K upon request
- High quality, mirror finish low glare reflector
- L90B10 up to 90,000 hours
- Multi directional, pivots on 2 axis
- 2 X SDCM
- 15°, 24°, 36°, 60°


CR155 – 500mA

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
CR155.500.15.93.61	CR155.500.15.93.63	CR155.500.15.93.66	15°	3000K	2046	19.5
CR155.500.15.94.61	CR155.500.15.94.63	CR155.500.15.94.66	15°	4000K	2086	19.5
CR155.500.24.93.61	CR155.500.24.93.63	CR155.500.24.93.66	24°	3000K	2124	19.5
CR155.500.24.94.61	CR155.500.24.94.63	CR155.500.24.94.66	24°	4000K	2166	19.5
CR155.500.36.93.61	CR155.500.36.93.63	CR155.500.36.93.66	36°	3000K	2128	19.5
CR155.500.36.94.61	CR155.500.36.94.63	CR155.500.36.94.66	36°	4000K	2170	19.5
CR155.500.60.93.61	CR155.500.60.93.63	CR155.500.60.93.66	60°	3000K	2128	19.5
CR155.500.60.94.61	CR155.500.60.94.63	CR155.500.60.94.66	60°	4000K	2170	19.5

CR155 – 700mA

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Beam	CCT	Lumens	Watts
CR155.700.15.93.61	CR155.700.15.93.63	CR155.700.15.93.66	15°	3000K	2742	27.5
CR155.700.15.94.61	CR155.700.15.94.63	CR155.700.15.94.66	15°	4000K	2796	27.5
CR155.700.24.93.61	CR155.700.24.93.63	CR155.700.24.93.66	24°	3000K	2925	27.5
CR155.700.24.94.61	CR155.700.24.94.63	CR155.700.24.94.66	24°	4000K	2983	27.5
CR155.700.36.93.61	CR155.700.36.93.63	CR155.700.36.93.66	36°	3000K	2908	27.5
CR155.700.36.94.61	CR155.700.36.94.63	CR155.700.36.94.66	36°	4000K	2966	27.5
CR155.700.60.93.61	CR155.700.60.93.63	CR155.700.60.93.66	60°	3000K	2908	27.5
CR155.700.60.94.61	CR155.700.60.94.63	CR155.700.60.94.66	60°	4000K	2966	27.5

CARDO 155 - 24°

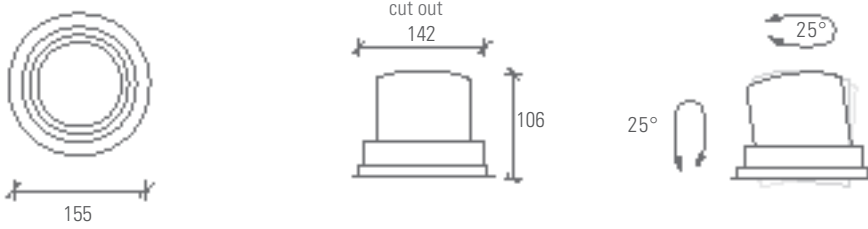

Trim Finishes

Black	
White	

Custom Luminaire Modifications

2700K Colour Temperature

95+ CRI

Custom outputs

Street Address:
39 Tinning Street, Brunswick,
Victoria, 3056, Australia

Postal Address:
PO BOX 5084
Moreland West VIC 3055

T +61 3 9222 5522
www.elslighting.com.au

