

# LUXIENT™ TRACKSPOT 66 | REFLECTOR

Premium track mounted luminaire with reflector technology



## Product Description

With an echo to classic designs of the past, but with an eye firmly on the future the Luxient Trackspot 66 offers perfect versatility and performance in any environment where both spot and track lighting is the preferred solution. Presenting in a sleek, modern cylindrical housing this luminaire is available with Variable Output Technology to optimise performance to exact project requirements and power usage.

Flexible Optic Technology enables the Trackspot 66 to deliver more accurate optics by offering flexibility to mix and match primary optics with secondary lenses and anti glare accessories to achieve the perfect results.

## Product Details

Absolute luminous flux	570lm - 1360lm
System watts	8W / 10W / 12W / 14W
Luminaire efficacy	up to 103lm/W
Colour deviation	2 SDCM
Colour rendition Index	>95
Correlated colour temperature	3000K / 4000K
Lumen maintenance	L90B10 90,000hours
Dimming method	DALI / Casambi
Optic	Aluminium Reflector
Beam angle	23° / 48° / 40°x 64°
Luminaire housing	Aluminium
Luminaire housing colour	Black / White / Custom
Luminaire baffle colour	Black
Country of origin	Australia

## OPTIONAL ACCESSORIES



SECONDARY LINEAR LENS



SPECIALTY COLOUR FILTERS



ANGLED SNOOT



SNOOT



HONEYCOMB LOUVRE



GLARE LOUVRE

## CUSTOM LUMINAIRE MODIFICATIONS

2700K and 3500K colour temperature  
 Custom housing size

## CUSTOM REFLECTOR FINISHES



GOLD



CHAMPAGNE



BRASS



BLACK



WHITE


## Product Variants

### TECHNICAL SPECIFICATIONS

Non Dimmable	DALI Dimmable	Casambi Dimmable	Beam Angle	CCT	Lumens	Watts
LXTR66.200.24.93.61	N/A	LXTR66.200.24.93.68	24°	3000K	725	8
LXTR66.200.24.94.61	N/A	LXTR66.200.24.94.68	24°	4000K	780	8
LXTR66.200.48.93.61	N/A	LXTR66.200.48.93.68	48°	3000K	772	8
LXTR66.200.48.94.61	N/A	LXTR66.200.48.94.68	48°	4000K	825	8
LXTR66.200.OV.93.61	N/A	LXTR66.200.OV.93.68	40°x 64°	3000K	570	8
LXTR66.200.OV.94.61	N/A	LXTR66.200.OV.94.68	40°x 64°	4000K	624	8
LXTR66.250.24.93.61	N/A	LXTR66.250.24.93.68	23°	3000K	888	10
LXTR66.250.24.94.61	N/A	LXTR66.250.24.94.68	23°	4000K	960	10
LXTR66.250.48.93.61	N/A	LXTR66.250.48.93.68	48°	3000K	944	10
LXTR66.250.48.94.61	N/A	LXTR66.250.48.94.68	48°	4000K	1014	10
LXTR66.250.OV.93.61	N/A	LXTR66.250.OV.93.68	40°x 64°	3000K	690	10
LXTR66.250.OV.94.61	N/A	LXTR66.250.OV.94.68	40°x 64°	4000K	760	10
LXTR66.300.24.93.61	LXTR66.300.24.93.66	LXTR66.300.24.93.68	23°	3000K	1040	12
LXTR66.300.24.94.61	LXTR66.300.24.94.66	LXTR66.300.24.94.68	23°	4000K	1125	12
LXTR66.300.48.93.61	LXTR66.300.48.93.66	LXTR66.300.48.93.68	48°	3000K	1110	12
LXTR66.300.48.94.61	LXTR66.300.48.94.66	LXTR66.300.48.94.68	48°	4000K	1190	12
LXTR66.300.OV.93.61	LXTR66.300.OV.93.66	LXTR66.300.OV.93.68	40°x 64°	3000K	815	12
LXTR66.300.OV.94.61	LXTR66.300.OV.94.66	LXTR66.300.OV.94.68	40°x 64°	4000K	890	12
LXTR66.350.24.93.61	LXTR66.350.24.93.66	LXTR66.350.24.93.68	23°	3000K	1195	14
LXTR66.350.24.94.61	LXTR66.350.24.94.66	LXTR66.350.24.94.68	23°	4000K	1295	14
LXTR66.350.48.93.61	LXTR66.350.48.93.66	LXTR66.350.48.93.68	48°	3000K	1270	14
LXTR66.350.48.94.61	LXTR66.350.48.94.66	LXTR66.350.48.94.68	48°	4000K	1360	14
LXTR66.350.OV.93.61	LXTR66.350.OV.93.66	LXTR66.350.OV.93.68	40°x 64°	3000K	930	14
LXTR66.350.OV.94.61	LXTR66.350.OV.94.66	LXTR66.300.OV.94.68	40°x 64°	4000K	1020	14

## Product Variants

### TECHNICAL SPECIFICATIONS

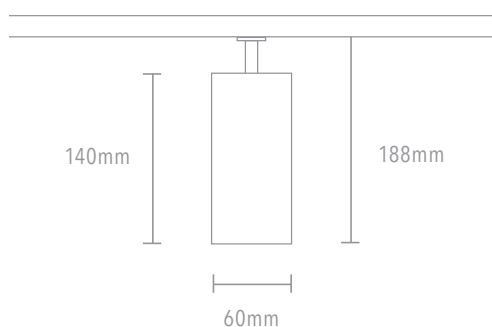

### OTHER LUMINAIRES WITHIN THE FAMILY

- Luxient Trackspot 66 - Lens
- Luxient Trackspot 90 - Lens
- Luxient Trackspot 90 - Reflector



Australian made like nothing ELS<sup>e</sup>.