

NIGHTFALL 407 SURFACE MOUNT

Premium surface mount linear downlight



Product Description

The most magical lights are seen at nightfall. And so it is with the Nightfall 407 Surface Mount Linear Downlight. The magic of this luminaire is that it presents beautifully and performs brilliantly without imposing on the overall design aesthetic.

Available with Variable Output Technology the Nightfall 407 ensures complete lighting control and performance for the user. This amazing luminaire also features a dual optical system that enables both glare control and beam intensity.

Product Details

Absolute luminous flux	478lm - 1320lm
System watts	5W / 7W / 9W / 10W / 12W
Luminaire efficacy	up to 110lm/W
Colour deviation	3 SDCM
Colour rendition Index	>90
Correlated colour temperature	3000K / 4000K / 2700K - 6500K
Lumen maintenance	L80B10 50,000hours
Driver	Integral
Dimming method	Trailing edge / DALI / Casambi
Optic	PMMA Clear Lens & PC Louvre
Louvre finish	Black / White
Beam angle	65° / 80° / Asymmetric
Luminaire housing	Aluminium
Luminaire housing colour	Black / White / Custom
Country of origin	Australia

HOUSING LOUVRE EXAMPLES



BLACK IN WHITE



ALL WHITE



ALL BLACK



WHITE IN BLACK

Product Variants

TECHNICAL SPECIFICATIONS - BLACK LOUVRE

NON DIMMABLE	TRAILING EDGE DIMMABLE	DALI DIMMABLE	CASAMBI DIMMABLE	BEAM ANGLE	CCT	CRI	LUMENS	WATTS
NFS407B.200.65.93.61	NFS407B.200.65.93.63	NFS407B.200.65.93.66	NFS407B.200.65.93.68	65°	3000K	90+	989	10
NFS407B.200.65.94.61	NFS407B.200.65.94.63	NFS407B.200.65.94.66	NFS407B.200.65.94.68	65°	4000K	90+	1032	10
NFS407B.200.80.93.61	NFS407B.200.80.93.63	NFS407B.200.80.93.66	NFS407B.200.80.93.68	80°	3000K	90+	1021	10
NFS407B.200.80.94.61	NFS407B.200.80.94.63	NFS407B.200.80.94.66	NFS407B.200.80.94.68	80°	4000K	90+	1065	10
NFS407B.250.65.93.61	NFS407B.250.65.93.63	NFS407B.250.65.93.66	NFS407B.250.65.93.68	65°	3000K	90+	1224	12
NFS407B.250.65.94.61	NFS407B.250.65.94.63	NFS407B.250.65.94.66	NFS407B.250.65.94.68	65°	4000K	90+	1279	12
NFS407B.250.80.93.61	NFS407B.250.80.93.63	NFS407B.250.80.93.66	NFS407B.250.80.93.68	80°	3000K	90+	1263	12
NFS407B.250.80.94.61	NFS407B.250.80.94.63	NFS407B.250.80.94.66	NFS407B.250.80.94.68	80°	4000K	90+	1320	12



WHITE TUNABLE - BLACK LOUVRE

DALI DIMMABLE	CASAMBI DIMMABLE	BEAM ANGLE	CCT	CRI	LUMENS	WATTS
NFS407B.100.65.WT.66	NFS407B.100.65.WT.68	65°	2700K -6500K	90+	478-520	5
NFS407B.100.80.WT.66	NFS407B.100.80.WT.68	80°	2700K -6500K	90+	493-537	5
NFS407B.150.65.WT.66	NFS407B.150.65.WT.68	65°	2700K -6500K	90+	708-767	7
NFS407B.150.80.WT.66	NFS407B.150.80.WT.68	80°	2700K -6500K	90+	731-792	7

Part codes listed are for black cells. For white cells replace 'B' in part code with 'W'.

Product Variants

TECHNICAL SPECIFICATIONS

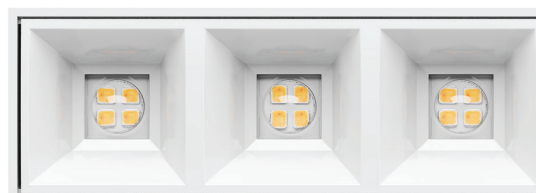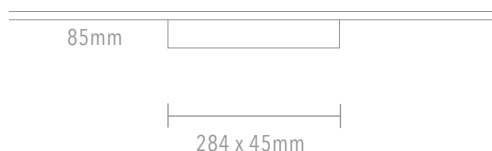

OTHER LUMINAIRES WITHIN THE FAMILY

- NFR100 Recessed
- NFS404 Surface
- NFR404 Recessed
- NFS407 Surface Aymmetric
- NFR407 Recessed
- NFR407 Recessed Aymmetric
- NFS414 Surface
- NFS414 Surface Asymmetric
- NFR414 Recessed
- NFR414 Recessed Asymmetric



Australian made like nothing ELS^e.