


VERSALINE™ 27 DUAL OPTIC | 600

Miniature surface mount linear luminaire for T-Bar ceilings

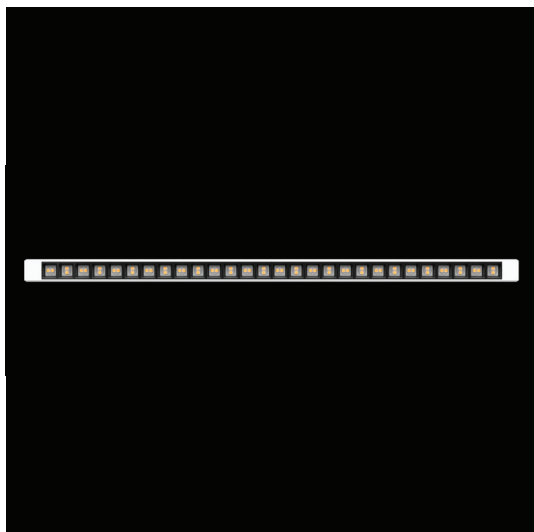

Product Description

Versatile and flexible would be the best words to describe the genius of the Versaline 27 dual optic luminaire. Presented in a long, sleek housing the Versaline 27 features a patented clip system for easy installation without tools. Which means it can also be relocated just as easily after installation.

Versaline is versatile too in lighting control. It is available as either non dim, trailing edge dimming, DALI or Casambi versions. This brilliant luminaire uses the Dual Optic System to control glare and maintain beam control and is available as a diffused lighting version.

Product Details

Absolute luminous flux	765lm - 2423lm
System watts	7W / 12W / 14W / 20W
Luminaire efficacy	up to 120lm/W
Colour deviation	3 SDCM
Colour rendition Index	>85
Correlated colour temperature	3000K / 4000K / 2700K - 6500K
Lumen maintenance	L80B10 60,000hours
Dimming method	Trailing edge / DALI / Casambi
Optic	PMMA Clear Lens & PC Louvre
Louvre finish	Black / White
Beam angle	58°
Luminaire housing	Aluminium
Luminaire housing colour	Black / White / Silver / Custom
Country of origin	Australia

CUSTOM LUMINAIRE MODIFICATIONS

Custom lengths
Custom body colour
90° corner angles

LOUVRE OPTIONS



BLACK



WHITE

Product Variants

TECHNICAL SPECIFICATIONS - DUAL OPTIC 578MM

NON DIMMABLE	TRAILING EDGE DIMMABLE	DALI DIMMABLE	CASAMBI DIMMABLE	LOUVRE COLOUR	BEAM ANGLE	CCT	LUMENS	WATTS
VL27B.30.58.3.578.61	VL27B.30.58.3.578.63	VL27B.30.58.3.578.66	VL27B.30.58.3.578.68	Black	58°	3000K	1577	14
VL27B.30.58.4.578.61	VL27B.30.58.4.578.63	VL27B.30.58.4.578.66	VL27B.30.58.4.578.68	Black	58°	4000K	1658	14
VL27B.40.58.3.578.61	VL27B.40.58.3.578.63	VL27B.40.58.3.578.66	VL27B.40.58.3.578.68	Black	58°	3000K	2049	20
VL27B.40.58.4.578.61	VL27B.40.58.4.578.63	VL27B.40.58.4.578.66	VL27B.40.58.4.578.68	Black	58°	4000K	2154	20
VL27W.30.58.3.578.61	VL27W.30.58.3.578.63	VL27W.30.58.3.578.66	VL27W.30.58.3.578.68	White	58°	3000K	1774	14
VL27W.30.58.4.578.61	VL27W.30.58.4.578.63	VL27W.30.58.4.578.66	VL27W.30.58.4.578.68	White	58°	4000K	1865	14
VL27W.40.58.3.578.61	VL27W.40.58.3.578.63	VL27W.40.58.3.578.66	VL27W.40.58.3.578.68	White	58°	3000K	2305	20
VL27W.40.58.4.578.61	VL27W.40.58.4.578.63	VL27W.40.58.4.578.66	VL27W.40.58.4.578.68	White	58°	4000K	2423	20

TECHNICAL SPECIFICATIONS - DUAL OPTIC TUNEABLE WHITE 578MM

DALI DIMMABLE	LOUVRE COLOUR	BEAM ANGLE	CCT	LUMENS	WATTS
VL27B.15.58.T.578.66	Black	58°	2700K - 6500K	765 - 829	7
VL27B.25.58.T.578.66	Black	58°	2700K - 6500K	1206 - 1304	12
VL27W.15.58.T.578.66	White	58°	2700K - 6500K	856 - 928	7
VL27W.25.58.T.578.66	White	58°	2700K - 6500K	1350 - 1460	12



OTHER LUMINAIRES WITHIN THE FAMILY

VL600 U Diffuser (578mm)
 VL1200 Dual Optic (1178mm)
 VL1200 U Diffuser (1178mm)



Australian made like nothing ELS^e.