


VERSALINE 27 U DIFFUSER | 1200

Miniature surface mount linear luminaire for T-Bar ceilings

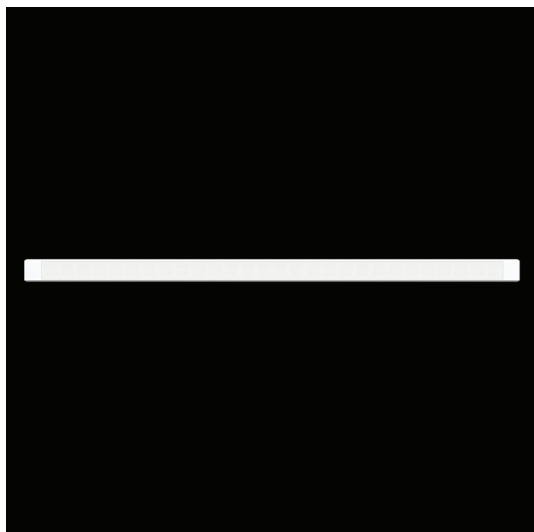

Product Description

Versatile and flexible would be the best words to describe the genius of the Versaline 27 U Diffuser luminaire. Presented in a long, sleek housing the Versaline 27 features a patented clip system for easy installation without tools. Which means it can also be relocated just as easily after installation.

Versaline is versatile too in lighting control. It is available as either non dim, DALI or Casambi versions. This Versaline 27 luminaire version features unique U diffuser to increase vertical illuminance.

Product Details

Absolute luminous flux	1308lm - 3680lm
System watts	14W / 24W / 27W / 37W
Luminaire efficacy	up to 99lm/W
Colour deviation	3 SDCM
Colour rendition Index	>85
Correlated colour temperature	3000K / 4000K / 2700K - 6500K
Lumen maintenance	L80B10 60,000hours
Dimming method	DALI / Casambi
Optic	Opal U diffuser
Beam angle	130°
Luminaire housing	Aluminium
Luminaire housing colour	Black / White / Silver / Custom
Country of origin	Australia

CUSTOM LUMINAIRE MODIFICATIONS

Custom lengths
Custom body colour
90° corner angles

Product Variants

TECHNICAL SPECIFICATIONS - U DIFFUSER 1178MM

NON DIMMABLE	DALI DIMMABLE	CASAMBI DIMMABLE	CCT	LUMENS	WATTS
VL27.30.U.3.1178.61	VL27.30.U.3.1178.66	VL27.30.U.3.1178.68	3000K	2694	27
VL27.30.U.4.1178.61	VL27.30.U.4.1178.66	VL27.30.U.4.1178.68	4000K	2834	37
VL27.40.U.3.1178.61	VL27.40.U.3.1178.66	VL27.40.U.3.1178.68	3000K	3502	27
VL27.40.U.4.1178.61	VL27.40.U.4.1178.66	VL27.40.U.4.1178.68	4000K	3680	37

TECHNICAL SPECIFICATIONS - U DIFFUSER TUNEABLE WHITE 1178MM

DALI DIMMABLE	BEAM ANGLE	CCT	LUMENS	WATTS
VL27.30.U.T.1178.66	130°	2700K - 6500K	1308 - 1416	14
VL27.50.U.T.1178.66	130°	2700K - 6500K	2062 - 2230	24



OTHER LUMINAIRES WITHIN THE FAMILY

- VL600 Dual Optic (578mm)
- VL600 U Diffuser (578mm)
- VL1200 Dual Optic (1178mm)



Australian made like nothing ELS^e.