

# LUXIENT™ 66 PENDANT

Premium cylindrical pendant



## Product Description

With an echo to classic designs of the past, but with an eye firmly on the future the Luxient 66 pendant offers perfect versatility and performance in any environment. Presenting in a sleek, modern cylindrical housing this luminaire is available in an array of finishes.

The specifically designed reflector system enables the Luxient 66 pendant to deliver exceptional luminaire efficacy while still providing superior glare control.


## Product Details

Absolute luminous flux	643lm - 1014lm
System watts	6.5W / 10W
Luminaire efficacy	up to 100lm/W
Colour deviation	2 SDCM
Colour rendition Index	>95
Correlated colour temperature	3000K / 4000K
Lumen maintenance	L90B10 90,000hours
Dimming method	Non dimm / Trailing Edge / DALI / Casambi
Optic	Metalised reflector
Beam angle	24° / 35° / 50°
Housing	Aluminium
Housing colour	Black / White / Custom
Suspension	Clear flex 1m
Country of origin	Australia

### CUSTOM LUMINAIRE MODIFICATIONS

2700K and 3500K colour temperature  
Custom housing sizes  
Remote gear

### OPTIONAL CLOTH FLEX

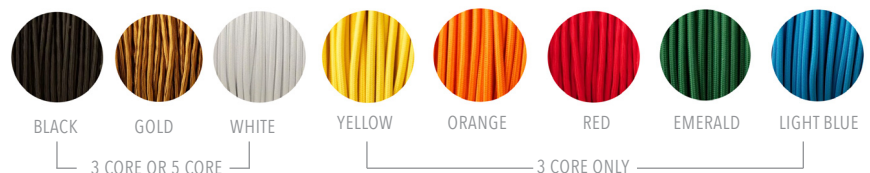

### CUSTOM REFLECTOR FINISHES



GOLD



CHAMPAGNE



BRASS



BLACK





WHITE

## Product Variants

### TECHNICAL SPECIFICATIONS

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Casambi Dimmable	Beam Angle	CCT	Lumens	Watts
LX66.150.24.93.61.P	LX66.150.24.93.63.P	LX66.150.24.93.66.P	LX66.150.24.93.68.P	24°	3000K	643	6.5
LX66.150.24.94.61.P	LX66.150.24.94.63.P	LX66.150.24.94.66.P	LX66.150.24.94.68.P	24°	4000K	658	6.5
LX66.150.35.93.61.P	LX66.150.35.93.63.P	LX66.150.35.93.66.P	LX66.150.35.93.68.P	35°	3000K	643	6.5
LX66.150.35.94.61.P	LX66.150.35.94.63.P	LX66.150.35.94.66.P	LX66.150.35.94.68.P	35°	4000K	658	6.5
LX66.150.50.93.61.P	LX66.150.50.93.63.P	LX66.150.50.93.66.P	LX66.150.50.93.68.P	50°	3000K	643	6.5
LX66.150.50.94.61.P	LX66.150.50.94.63.P	LX66.150.50.94.66.P	LX66.150.50.94.68.P	50°	4000K	658	6.5
LX66.250.24.93.61.P	LX66.250.24.93.63.P	LX66.250.24.93.66.P	LX66.250.24.93.68.P	24°	3000K	985	10
LX66.250.24.94.61.P	LX66.250.24.94.63.P	LX66.250.24.94.66.P	LX66.250.24.94.68.P	24°	4000K	1014	10
LX66.250.35.93.61.P	LX66.250.35.93.63.P	LX66.250.35.93.66.P	LX66.250.35.93.68.P	35°	3000K	985	10
LX66.250.35.94.61.P	LX66.250.35.94.63.P	LX66.250.35.94.66.P	LX66.250.35.94.68.P	35°	4000K	1014	10
LX66.250.50.93.61.P	LX66.250.50.93.63.P	LX66.250.50.93.66.P	LX66.250.50.93.68.P	50°	3000K	985	10
LX66.250.50.94.61.P	LX66.250.50.94.63.P	LX66.250.50.94.66.P	LX66.250.50.94.68.P	50°	4000K	1014	10

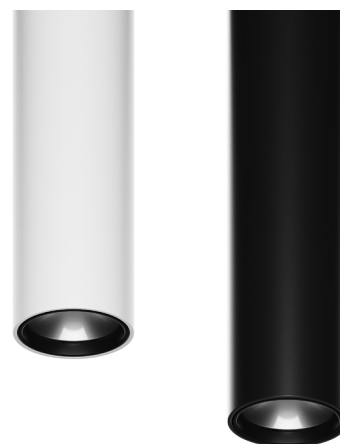

### OTHER LUMINAIRES WITHIN THE FAMILY

- Luxient 66 - Recessed
- Luxient 66 - Surface mounted
- Luxient 66 - Trackspot
- Luxient 90 - Recessed
- Luxient 90 - Surface mounted
- Luxient 90 - Pendant
- Luxient 90 - Trackspot
- Luxient 110 - Recessed
- Luxient 110 - Surface mounted
- Luxient 110 - Pendant
- Luxient 125 - Recessed
- Luxient 150 - Recessed
- Luxient 150 - Surface mounted
- Luxient 150 - Pendant



Australian made like nothing ELS<sup>e</sup>.