

## LUXIENT™ 90 PENDANT

Premium cylindrical pendant



## Product Description

With an echo to classic designs of the past, but with an eye firmly on the future the Luxient 90 pendant offers perfect versatility and performance in any environment. Presenting in a sleek, modern cylindrical housing this luminaire is available in an array of finishes.

The specifically designed reflector system enables the Luxient 90 pendant to deliver exceptional luminaire efficacy while still providing superior glare control.


## Product Details

Absolute luminous flux	930lm - 1403lm
System watts	10W / 14W
Luminaire efficacy	up to 107lm/W
Colour deviation	2 SDCM
Colour rendition Index	>95
Correlated colour temperature	3000K / 4000K
Lumen maintenance	L90B10 90,000hours
Dimming method	Non dimm / Trailing Edge / DALI / Casambi
Optic	Metallised reflector
Beam angle	24° / 35° / 50° / 80°
Housing	Aluminium
Housing colour	Black / White / Custom
Suspension	Clear flex 1m
Country of origin	Australia

## CUSTOM LUMINAIRE MODIFICATIONS

2700K and 3500K colour temperature  
Custom housing sizes  
Remote gear

## OPTIONAL CLOTH FLEX

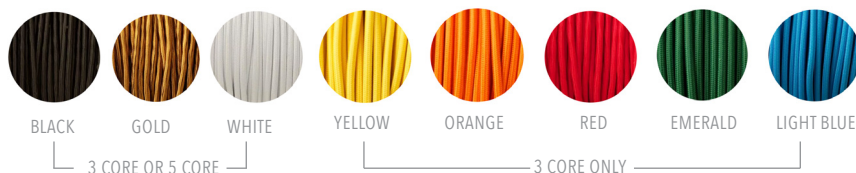

## CUSTOM REFLECTOR FINISHES



GOLD



CHAMPAGNE



BRASS



BLACK




WHITE

## Product Variants

### TECHNICAL SPECIFICATIONS

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Casambi Dimmable	Beam Angle	CCT	Lumens	Watts
LX90.250.24.93.61.P	LX90.250.24.93.63.P	LX90.250.24.93.66.P	LX90.250.24.93.68.P	24°	3000K	905	10
LX90.250.24.94.61.P	LX90.250.24.94.63.P	LX90.250.24.94.66.P	LX90.250.24.94.68.P	24°	4000K	982	10
LX90.250.35.93.61.P	LX90.250.35.93.63.P	LX90.250.35.93.66.P	LX90.250.35.93.68.P	35°	3000K	903	10
LX90.250.35.94.61.P	LX90.250.35.94.63.P	LX90.250.35.94.66.P	LX90.250.35.94.68.P	35°	4000K	994	10
LX90.250.50.93.61.P	LX90.250.50.93.63.P	LX90.250.50.93.66.P	LX90.250.50.93.68.P	50°	3000K	1049	10
LX90.250.50.94.61.P	LX90.250.50.94.63.P	LX90.250.50.94.66.P	LX90.250.50.94.68.P	50°	4000K	1071	10
LX90.250.80.93.61.P	LX90.250.80.93.63.P	LX90.250.80.93.66.P	LX90.250.80.93.68.P	80°	3000K	930	10
LX90.250.80.94.61.P	LX90.250.80.94.63.P	LX90.250.80.94.66.P	LX90.250.80.94.68.P	80°	4000K	984	10
LX90.350.24.93.61.P	LX90.350.24.93.63.P	LX90.350.24.93.66.P	LX90.350.24.93.68.P	24°	3000K	1260	14
LX90.350.24.94.61.P	LX90.350.24.94.63.P	LX90.350.24.94.66.P	LX90.350.24.94.68.P	24°	4000K	1340	14
LX90.350.35.93.61.P	LX90.350.35.93.63.P	LX90.350.35.93.66.P	LX90.350.35.93.68.P	35°	3000K	1299	14
LX90.350.35.94.61.P	LX90.350.35.94.63.P	LX90.350.35.94.66.P	LX90.350.35.94.68.P	35°	4000K	1403	14
LX90.350.50.93.61.P	LX90.350.50.93.63.P	LX90.350.50.93.66.P	LX90.350.50.93.68.P	50°	3000K	1330	14
LX90.350.50.94.61.P	LX90.350.50.94.63.P	LX90.350.50.94.66.P	LX90.350.50.94.68.P	50°	4000K	1383	14
LX90.350.80.93.61.P	LX90.350.80.93.63.P	LX90.350.80.93.66.P	LX90.350.80.93.68.P	80°	3000K	1263	14
LX90.350.80.94.61.P	LX90.350.80.94.63.P	LX90.350.80.94.66.P	LX90.350.80.94.68.P	80°	4000K	1333	14



### OTHER LUMINAIRES WITHIN THE FAMILY

- Luxient 66 - Recessed
- Luxient 66 - Surface mounted
- Luxient 66 - Pendant
- Luxient 66 - Trackspot
- Luxient 90 - Recessed
- Luxient 90 - Surface mounted
- Luxient 90 - Trackspot
- Luxient 110 - Recessed
- Luxient 110 - Surface mounted
- Luxient 110 - Pendant
- Luxient 125 - Recessed
- Luxient 150 - Recessed
- Luxient 150 - Surface mounted
- Luxient 150 - Pendant



Australian made like nothing ELS<sup>e</sup>.