

# LUXIENT™ 110 PENDANT

Premium cylindrical pendant



## Product Description

With an echo to classic designs of the past, but with an eye firmly on the future the Luxient 110 pendant offers perfect versatility and performance in any environment. Presenting in a sleek, modern cylindrical housing this luminaire is available in an array of finishes.

The specifically designed reflector system enables the Luxient 110 pendant to deliver exceptional luminaire efficacy while still providing superior glare control.


## Product Details

Absolute luminous flux	1282lm - 1827lm
System watts	13W / 19W
Luminaire efficacy	up to 100lm/W
Colour deviation	2 SDCM
Colour rendition Index	>95
Correlated colour temperature	3000K / 4000K
Lumen maintenance	L90B10 90,000hours
Dimming method	Non dimm / Trailing Edge / DALI / Casambi
Optic	Metallised reflector
Beam angle	31° / 60° / 85°
Housing	Aluminium
Housing colour	Black / White / Custom
Suspension	Clear flex 1m
Country of origin	Australia

### CUSTOM LUMINAIRE MODIFICATIONS

- 2700K and 3500K colour temperature
- White tuneable 2700K-6500K
- Custom housing sizes
- Remote gear

### OPTIONAL CLOTH FLEX

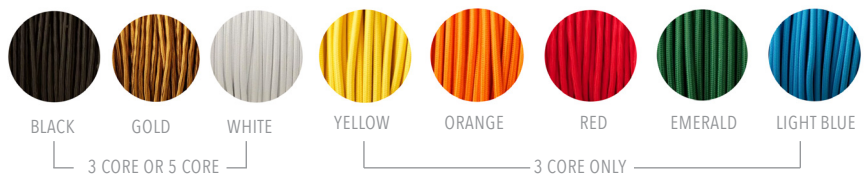

### CUSTOM REFLECTOR FINISHES



GOLD



CHAMPAGNE



BRASS



BLACK



WHITE


## Product Variants

### TECHNICAL SPECIFICATIONS

Non Dimmable	Trailing Edge Dimmable	DALI Dimmable	Casambi Dimmable	Beam Angle	CCT	Lumens	Watts
LX110.350.31.93.61.P	LX110.350.31.93.63.P	LX110.350.31.93.66.P	LX110.350.31.93.68.P	31°	3000K	1282	13
LX110.350.31.94.61.P	LX110.350.31.94.63.P	LX110.350.31.94.66.P	LX110.350.31.94.68.P	31°	4000K	1307	13
LX110.350.60.93.61.P	LX110.350.60.93.63.P	LX110.350.60.93.66.P	LX110.350.60.93.68.P	60°	3000K	1282	13
LX110.350.60.94.61.P	LX110.350.60.94.63.P	LX110.350.60.94.66.P	LX110.350.60.94.68.P	60°	4000K	1307	13
LX110.350.85.93.61.P	LX110.350.85.93.63.P	LX110.350.85.93.66.P	LX110.350.85.93.68.P	85°	3000K	1295	13
LX110.350.85.94.61.P	LX110.350.85.94.63.P	LX110.350.85.94.66.P	LX110.350.85.94.68.P	85°	4000K	1320	13

LX110.500.31.93.61.P	LX110.500.31.93.63.P	LX110.500.31.93.66.P	LX110.500.31.93.68.P	31°	3000K	1772	19
LX110.500.31.94.61.P	LX110.500.31.94.63.P	LX110.500.31.94.66.P	LX110.500.31.94.68.P	31°	4000K	1807	19
LX110.500.60.93.61.P	LX110.500.60.93.63.P	LX110.500.60.93.66.P	LX110.500.60.93.68.P	60°	3000K	1772	19
LX110.500.60.94.61.P	LX110.500.60.94.63.P	LX110.500.60.94.66.P	LX110.500.60.94.68.P	60°	4000K	1807	19
LX110.500.85.93.61.P	LX110.500.85.93.63.P	LX110.500.85.93.66.P	LX110.500.85.93.68.P	85°	3000K	1792	19
LX110.500.85.94.61.P	LX110.500.85.94.63.P	LX110.500.85.94.66.P	LX110.500.85.94.68.P	85°	4000K	1827	19

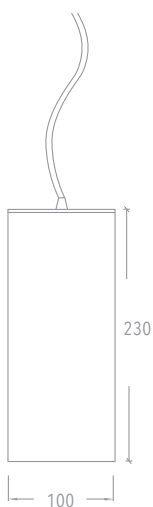

### OTHER LUMINAIRES WITHIN THE FAMILY

- Luxient 66 - Recessed
- Luxient 66 - Surface mounted
- Luxient 66 - Pendant
- Luxient 66 - Trackspot
- Luxient 90 Recessed
- Luxient 90 - Surface mounted
- Luxient 90 - Pendant
- Luxient 90 Trackspot
- Luxient 110 - Recessed
- Luxient 110 - Surface mount
- Luxient 125 - Recessed
- Luxient 150 - Recessed
- Luxient 150 - Surface mounted
- Luxient 150 - Pendant



Australian made like nothing ELS<sup>e</sup>.