

SYSTEM 66 ADVANCED | RECESSED

Customisable linear lighting solution



Product Description

Designed and made in Australia the SK 66 Advanced is a completely customisable and versatile linear lighting solution. Quality of light is key to the design of the luminaires with the option to specify a specifically engineered 'Full Spectrum' version designed to minimise potential negative effects of artificial lighting to people, pets and plants.

This amazing luminaire also features the option of a specifically engineered U diffuser to optimise vertical illuminance.

Product Details

Absolute luminous flux p/m	598lm - 1563lm
System watts p/m	13W /25W
Colour deviation	2 SDCM
Colour rendition Index	>95
Correlated colour temperature	Static White - 3000K / 4000K, Full Spectrum - 4000K
Cyanosis approval	Available with CRI 4000K
Dimming method	Non dimm / DALI / Casambi
Driver	Integral
Material	Extruded aluminium body, polycarbonate diffuser
Illumination	Direct
Optic	Opal flat diffuser / opal U diffuser
Mounting	Recessed
Accessories	End caps / joiners / mitered corners / coverplate
Housing colour	Black / White / Custom
Length	Custom lengths made to order
Warranty	10 years
Colour consistency warranty	10 years
Country of origin	Australia

CUSTOM LUMINAIRE MODIFICATIONS

2700K & 3500K
IP54
Screwless endcaps

Product Variants

TECHNICAL SPECIFICATIONS - STATIC WHITE - FLAT DIFFUSER

Direct Illumination Flat Diffuser		
Delivered Lumens per 1000mm	702	1349
System Watts per meter	13	25
CRI	95+	95+
LED's divisible by	25mm	25mm

TECHNICAL SPECIFICATIONS - STATIC WHITE - U DIFFUSER

Direct Illumination U Diffuser		
Delivered Lumens per 1000mm	813	1563
System Watts per meter	13	25
CRI	95+	95+
LED's divisible by	25mm	25mm

TECHNICAL SPECIFICATIONS - FULL SPECTRUM - FLAT DIFFUSER

Direct Illumination Flat Diffuser		
Delivered Lumens per 1000mm	598	1040
System Watts per meter	13	25
CRI	95+	95+
LED's divisible by	50mm	50mm

TECHNICAL SPECIFICATIONS - FULL SPECTRUM - U DIFFUSER


Direct Illumination U Diffuser		
Delivered Lumens per 1000mm	693	1204
System Watts per meter	13	25
CRI	95+	95+
LED's divisible by	50mm	50mm



Australian made like nothing ELS^e.

HOW TO ORDER

SK66	25	93	F	XXXX	61	W
profile	wattage per meter down	CRI CCT	diffuser	profile length in mm	dimming type	colour finish

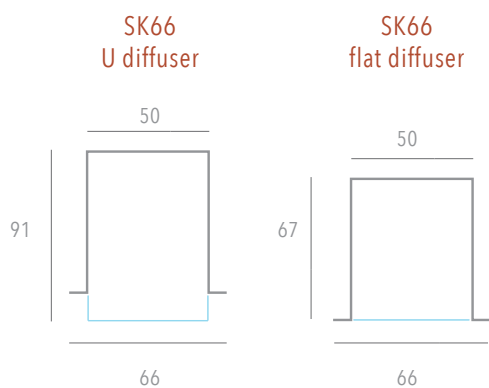

OTHER LUMINAIRES WITHIN THE FAMILY

- Nano 7
- Nano 15
- SL 30
- UD 30
- SL 40
- UD 50
- System 50
- System 60
- System 66
- Loop 80
- Valley 78



Australian made like nothing ELS^e.